

QUICK REFERENCE

PRODUCT & SERVICE GUIDE

2005

- Must-stock HP and Lexmark laser printer parts
- Quick guides for maintenance kits, service manuals, and printer memory
- At-A-Glance lists of major assemblies and parts



**PARTS
NOW!**
The leader in printer parts

If you work on or purchase parts for laser printers, you know how important it is to have timely information at your fingertips. Part numbers and cross reference charts are useful pieces of information that can mean the difference between being an efficient—and profitable—company, or one that struggles to keep up with the competition.

It's rare to find all of these resources in one place, but the Quick Reference Product & Service Guide has done just that. A PARTS NOW! publication since 1998, the Quick Reference Product & Service Guide contains:

- HP & Lexmark Hot Parts
- Hot Part At-A-Glance Reference
- HP Part Number Cross Reference
- Service Manual Quick Lists
- Maintenance Kit Quick Lists
- Memory Quick Lists
- Parts Now! Exclusive Kit Contents

We think you'll agree that the Quick Reference Product & Service Guide is the most comprehensive tool in the industry!

Using the Hot Parts Lists

The largest section of the Quick Reference Product & Service Guide is the HP & Lexmark Hot Parts Lists, which contains model information and commonly replaced parts for each printer model. What is a commonly replaced part? These are the parts that must be replaced with the most frequency, so they are what you need to have on hand if you are working consistently with a particular model.

You will see check marks next to some of the parts listed in the Model Information section of the Hot Parts Lists. These are commonly replaced parts, along with all the parts in the Commonly Replaced Parts section of each printer model.

The Quick Reference Product & Service Guide is on the Web!


The PARTS NOW! website at www.partsnow.com is full of resources to help you do your job better—including the Quick Reference Product & Service Guide! From our homepage, click on the Quick Reference Guide link. You'll find all of the same information as is contained here, but be able to access it from any computer with Internet access.

How to order:

- Call us toll free at (800) 886-6688 and speak to a dedicated account representative. Orders received from 7 a.m. to 7 p.m. CST (6 p.m. CST on the web) will be shipped same day.
- Fax us an order at (608) 276-9593
- Visit our online ordering website, Shop Now!

How to order via our website

- Sign up for web access from our homepage (www.partsnow.com) by clicking on the Order Online @ Shop Now! link, then filling out and submitting the form. Access may take up to two business days to be granted.
- Once you are sent your login ID and password, visit Shop Now! (<https://shopnow.partsnowllc.com>) and log in. Once logged in, you have access to purchase parts, check your Order History, view the status of your RMAs, or just check to see if we have a part in stock.

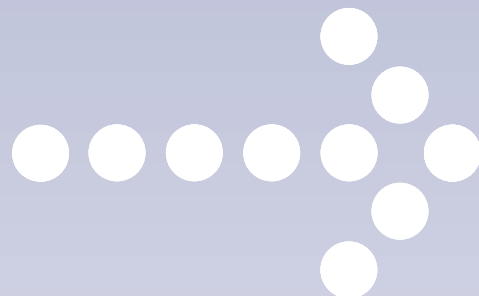


PARTS NOW!

Table of Contents

2005

HP At-A-Glance Hot Parts List	2
HP Hot Parts List - Monochrome	5
LJ II / IID / III / IIID / IIP / IIIP/ IIISi / 4Si	5
LJ 4 / 4+ / 5 / 4L / 4P	6
LJ 4V / 5L / 6L / 3100 / 3150	7
LJ 5P / 6P / 5Si / 5Si Mopier / 8000 / 1100 / 3200	8
LJ 1000 / 1200 / 1220 / 1010 / 1012 / 1015	9
LJ 1150 / 1300 / 2100 / 2200	10
LJ 2300 / 3015 / 3020 / 3030 MFP / 3380 MFP	11
LJ 4000 / 4050 / 4100 / 4200 / 4300	12
LJ 5000 / 5100 / 8100 / 8150 / 9000	13
HP Hot Parts List - Color	14
Color LJ / Color LJ 5 / 1500 / 2500 / 2550	14
Color LJ 3500 / 3700 / 4500 / 4550	15
Color LJ 4600 / 5500 / 8500 / 8550	16
Color LJ 4600 / 4650 / 5500 / 8500 / 8550 / 9500	17
Lexmark At-A-Glance Hot Parts List	19
Lexmark Hot Parts List - Monochrome	22
LaserPrinter 4019 Series / LaserPrinter 4029 Series (10/20/30/40 models) / Optra E	22
LaserPrinter 4039 Series / Optra E310 / E312	23
Optra R / Optra L / Optra M410 / M412	24
Optra N240 / N245 / Optra S	25
Optra T610 / T612 / T614 / T616 / Lexmark T620 / T622 / Optra W810	26
Lexmark E210 / E232 / E320 / E322 / E321 / E323 / E330 / E332	27
Lexmark T420 / T520 / T522 / T630 / T632 / T634	28
Lexmark W812 / W820	29
Lexmark Hot Parts List - Color	29
Optra C	29
Optra Color 1200 / Optra C710 / Optra SC 1275	30
Lexmark C510 / C720	31
Lexmark C750 / 752 / C910 / C912	32
Monochrome Maintenance Kit Guide	33
Color Maintenance Kit Guide	34
HP Service Manuals	35
Lexmark Service Manuals	36
HP Memory Guide	37
Lexmark Memory Guide	38
HP Part Number Cross Reference Guide	39
Parts Now! Exclusive Kit Contents	42

HP Hot Parts List

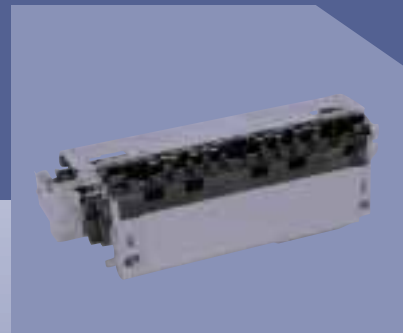

PARTS NOW!

HP At-A-Glance Hot Parts List

2005

LaserJet	II/IIID/III/IIID	IIP/IIP Plus/IIIP	IIISi/4Si	4	4+
Fuser, 110V:	RG1-0939	RG1-1788	RG5-0046	RG5-0454	RG5-0879
Maintenance Kit:	33449-69007	33481-69007	C2062-67902	C2001-69012	C2037-67910
Pickup Assembly:	RG1-0931	RG1-1792	RG5-0025	RG5-0451	RG5-0877
Delivery Assembly:	RG1-0945	RG1-1791	RG5-0381 (job offset)	RG5-0456	RG5-0886
Pickup Roller:	RA1-3851	RA1-7573	RF5-0041	RB1-2127 (MP tray) RB1-2126 (paper cas.)	RB1-2127/RB1-2205 (MP tray)
Opt. Tray PU Roller:	N/A	RA1-7674 (small) RA1-7824 (large)	N/A	RB1-2632 (lower cas.)	RB1-3477 (paper cas.) RB1-2650 (lower cas.)
Separation Pad:	RF1-1145	RG1-1912	N/A	RF5-0343	RF5-0343
Transfer Roller:	RG1-0933 (transfer corona)	RA1-7627	RG5-0141	RF5-0349	RF5-0349
Toner Cartridge:	92295A	92275A	92291A	92298A	92298A
LaserJet	4L/4P	4V	5	5L	5P
Fuser, 110V:	RG5-0676	RG5-1557	RG5-0879	RG5-1964	RG5-1700
Maintenance Kit:	N/A	C3141-67915	C3916-67901	H3971-60001	H3973-60001
Pickup Assembly:	RG5-0668	RG5-1391	RG5-2195	RG5-1951	RG9-1082 (tray 1)
Delivery Assembly:	RG5-0683 (upper output roller)	RG5-0198	RG5-2189	RG5-2012	RG5-1692 (tray 2) RG5-0683 (upper output roller)
Pickup Roller:	RB1-3029	RB1-1411 (MP tray)	RB1-2127 (tray 1) RB1-2205 (tray 1)	RB2-1634	RB1-2205 (tray 1)
Opt. Tray PU Roller:	N/A	RB1-1386 (cassette) C3760-60506	RB1-7911 (tray 2) RB1-7983 (tray 3)	N/A	RB1-6332 (tray 2)
Separation Pad:	N/A	RF5-0302	RF5-0343	RY7-5077 (kit)	RF5-0343
Transfer Roller:	RF5-0596	RG5-1410	RF5-0349	RF5-1534	RF5-1290
LaserJet	5Si/8000	6L	6P	1000/12xx/33xx	1010/12/15
Fuser, 110V:	RG5-4447	RG5-3459	RG5-4110	RG9-1493	RM1-0649
Maintenance Kit:	C3971-67903	H3972-60001	H3966-60001	KIT-MAINT-1200-PNO	N/A
Pickup Assembly:	RG5-1880 (tray 1) RG5-1852 (tray 2 & 3)	RG5-3486	RG5-2791 (tray 1) RG5-2796 (tray 2)	RG0-1085 (1000 only) RG0-1003 (12xx only) RG0-1120 (33xx only)	RM1-0641 RM1-0864
Delivery Assembly:	RG5-1874	RG5-3474	RG5-0683 (upper output roller)	RG0-1010	RM1-0659 RM1-0859 (tray 1)
Pickup Roller:	RB1-6730 (tray 1)	RB2-1634	RB1-2205 (tray 1)	RF0-1008	RL1-0266
Opt. Tray PU Roller:	RF5-1834 (feed/sep) RF5-1835 (tray 2 & 3)	N/A	RB1-6332 (tray 2)	N/A	N/A
Separation Pad:	RF5-1455	RY7-5077 (kit)	RF5-0343	RF0-1014	RM1-0648
Transfer Roller:	RF5-1412	RF5-1534	RF5-0596	RG9-1483	RM1-0658
Toner Cartridge:	C3909A	C3906A	C3903A	C7115A	Q2612A

PARTS NOW!

HP At-A-Glance Hot Parts List

2005

LaserJet	1100/3200	1150/1300	2100	2200	
Fuser, 110V:	RG5-4589	RM1-0535	RG5-4132	RG5-5559	
Maintenance Kit:	H3965-60001	KIT-MAINT-1300	H3974-60001	H3978-60001	
Pickup Assembly:	N/A	RM1-0531	RG5-4128 (tray 1)	RG5-4128 (tray 1)	
Delivery Assembly:	RG5-4593	RM1-0556	RG5-4127 (tray 2)	C7058-67907 (tray 2)	
Pickup Roller:	RB2-4026	RL1-0303	RG5-4119	C7058-67905	
Opt. Tray PU Roller:	N/A	N/A	RB2-2900 (tray 1)	RB2-2900 (tray 1)	
Separation Pad:	RF5-2886	RF0-1014	RB2-2891 (tray 2)	RB2-6304 (tray 2)	
Transfer Roller:	RG5-4657	RM1-0550	RB2-6348 (tray 1)	RF5-3272 (tray 1)	
Toner Cartridge:	C4092A	Q2624A (1150) Q2613A (1300)	RB2-3008 (tray 2 & 3)	RB2-3008 (tray 2 & 3)	
Transfer Roller:	RG5-4657	RM1-0550	RG5-4164	RG5-5581	
Toner Cartridge:	C4092A	Q2624A (1150) Q2613A (1300)	C4096A	C4096A	
LaserJet	2300	3015/20/30 MFP	3100/3150	3380 MFP	
Fuser, 110V:	RM1-0354	RM1-0862	RG5-4678	RM1-0999	
Maintenance Kit:	U6180-60001	N/A	H3975-60001	N/A	
Pickup Assembly:	RM1-0332	N/A	RG5-3486	RM1-0838	
Delivery Assembly:	RM1-0371	RM1-0859 (tray 1)	RG5-3474	N/A	
Pickup Roller:	RC1-0945 (tray 1)	RL1-0266	RB2-1634	RL1-0303	
Opt. Tray PU Roller:	RB2-6304 (tray 2 & 3)	N/A	N/A	N/A	
Separation Pad:	RC1-0939 (tray 1) RC1-0954 (250-sheet tray) RF5-4258 (500-sheet tray)	RM1-0648	RY7-5077 (kit)	RF0-1014	
Transfer Roller:	RM1-0343	RM1-0658	RF5-1534	RM1-0550	
Toner Cartridge:	Q2610A	Q2612A	C3906A	C7115A	
LaserJet	4000/4050	4100	4200	4300	5000
Fuser, 110V:	RG5-2661	RG5-5063	RM1-0013	RM1-0101	RG5-5455
Maintenance Kit:	C4118-67909	C8057A	Q2429A	Q2436A	C4110-67914
Pickup Assembly:	RG5-2655 (tray 1)	RG5-5084 (tray 1)	RM1-0004 (tray 1)	RM1-0004 (tray 1)	RG5-3519 (tray 1)
Delivery Assembly:	RF5-2484 (tray 2) RG5-2672 (500-sheet)	RG5-5277 (tray 2)			RG5-3521 (tray 2)
Pickup Roller:	RG5-2648	RG5-5094	RM1-0026	RM1-0026	RG5-3542
Opt. Tray PU Roller:	RG5-3718 (tray 1)	RG5-3718 (tray 1)	RL1-0019 (tray 1)	RL1-0019 (tray 1)	RB2-1820 (tray 1)
Feed/Sep. Roller:	RB1-8865 (tray 2 & 3)	RB1-8957 (tray 2 & 3)	RM1-0036 (tray 2)	RM1-0036 (tray 2)	RB2-1821 (tray 2 & 3)
Separation Pad:	RF5-1885	RF5-3114	RM1-0037	RM1-0037	N/A
Transfer Roller:	RG5-5281	RF5-3086	RL1-0007	RL1-0007	RF5-3439 (tray 1)
Toner Cartridge:	RG5-2655 (tray 1 asm)				RG9-1485 (tray 2)
Transfer Roller:	RG5-4283	RG5-5295	RL1-0044	RL1-0044	RG5-3579
Toner Cartridge:	C4127A	C8061A	Q1338A	Q1339A	C4129X

PARTS NOW!

HP At-A-Glance Hot Parts List

2005

LaserJet	5100	8100/8150	9000	CLJ/CLJ 5
Fuser, 110V:	RG5-7060	RG5-6532	RG5-5750	C3969A#110
Maintenance Kit:	Q1860-67909	C3914A	C9152A	C3967A (drum), C3968A (transfer) C3964A (coating)
Pickup Assembly:	RG5-3519 (tray 1) RG5-3521 (tray 2)	RG5-4330 (tray 1) RG5-4334 (tray 2 & 3)	RG5-5677	N/A
Delivery Assembly:	RG5-3542	RG5-1874	RG5-5643	07BA-5005KC
Pickup Roller:	RB2-1820 (tray 1)	RB1-9526	RF5-3340	07BA-4062KC
Opt. Tray PU Roller:	RB2-1821 (tray 2 & 3)	RF5-2708 RF5-1834 (feed/sep)	RF5-3403 (tray 1) RF5-3404 (feed/sep)	N/A
Separation Pad:	RF5-4119 (tray 1) RF5-4120 (tray 2)	RF5-2703 (tray 1)	N/A	N/A
Transfer Roller:	RG9-1542	RF9-1394	RG5-5662	C3968A (transfer belt asm)
Toner Cartridge:	C4129X	C4182X	C8543X	C3105A (K), C3102A (C) C3104A (M), C3103A (Y)
Color LaserJet	1500/2500/2550	3500	3700	4500/4550
Fuser, 110V:	RG5-6903	RM1-0428	RM1-0428	RG5-5154
Maintenance Kit:	KIT-MAINT-2500	Q3655A	Q3655A	C4197A (fuser), C4195A (drum) C4196A (transfer)
Pickup Assembly:	RG5-6952 (tray 1)	RM1-0760	RM1-0449	N/A
Delivery Assembly:	RG5-5697 (upper roller) RG5-6936 (lower roller)	RM1-0469	RM1-0469	RG5-5135
Pickup Roller:	RB3-0160	RC1-1535 (tray 1)	RC1-1535 (tray 1)	RB2-0717
Opt. Tray PU Roller:	RB3-0161 (tray 2 & 3)	RM1-0731 (tray 2 & 3)	RM1-0731 (tray 2 & 3)	RB1-8865 (tray 2 & 3) RF5-1885 (feed/sep.) RF5-2092 (tray 2 feed)
Separation Pad:	RF5-4012 (tray 1) RB2-9960 (tray 2 & 3)	RC1-0939 (tray 1) RC1-0954 (tray 2)	RC1-0939 (tray 1) RC1-0954 (tray 2)	RB2-0734 (MP tray)
Transfer Roller:	RF5-4040	RM1-0740	RM1-0740	C4196A (transfer kit)
Toner Cartridge:	C9700A (K), C9701A (C) C9703A (M), C9702A (Y)	Q2670A (K), Q2671A (C) Q2672A (M), Q2673A (Y)	Q2670A (K), Q2681A (C) Q2682A (M), Q2683A (Y)	C4191A (K), C4192A (C) C4193A (M), C4194A (Y)
Color LaserJet	4600/4650	5500	8500/8550	9500
Fuser, 110V:	RG5-6493	RG5-6848	RG5-3060	RG5-6098
Maintenance Kit:	C9725A (fuser, 4600) C9724A (transfer, 4600) Q3676A (fuser, 4650) Q3675A (transfer, 4650)	C9735A (fuser) C9734A (transfer) RY7-5097 (roller)	C4155A (fuser) C4153A (drum) C4154A (transfer)	C8556A (fuser) C8555A (transfer) C8554A (cleaning)
Pickup Assembly:	RG5-6468	RG5-6670 RG5-3132 (tray 2 & 3)	RG5-3054 (tray 1)	RG5-6196
Delivery Assembly:	N/A	N/A	RG0-0110	RG5-6017
Pickup Roller:	RG9-1529	RF5-3340 (in roller kit)	RB1-9526 (tray 1)	RB2-1820 (tray 1)
Opt. Tray PU Roller:	RF5-3739 (tray 2)	N/A	RF5-1835 (tray 2 & 3)	RF5-3340 (tray 2 & 3)
Separation Pad:	RG5-3750 (tray 1)	RF5-3865	RF5-1989 (tray 1)	N/A
Transfer Roller:	C9724A (transfer kit)	C9734A (transfer kit)	C4154A (transfer kit) RG5-3047 (transfer belt)	RG5-6178
Toner Cartridge:	C9720A (K), C9721A (C) C9723A (M), C9722A (Y)	C9730A (K), C9731A (C) C9733A (M), C9732A (Y)	C4149A (K), C4150A (C) C4151A (M), C4152A (Y)	C8550A (K), C8551A (C) C8552A (M), C8553A (Y)

PARTS NOW!

HP Hot Parts List - Monochrome Laser

2005

HP LaserJet II/IIID/III/IIID

Model Information

	LJ II / IID	LJ III / IIID
Engine Type:	SX	SX
Model Number:	33440A/33447A	33449A/33459A
Release Date:	Apr-86	Apr-90
Max PPM:	8	8
Max DPI:	300	300
Duty Cycle:	12,000 pg/month	16,000 pg/month

✓Fuser, 110V:	RG1-0939
✓Maintenance Kit:	33449-69007
✓Pickup Assembly:	N/A
✓Delivery Assembly:	RG1-0945
✓Pickup Roller:	RA1-3851
✓Separation Pad:	RF1-1145
✓Transfer Roller:	RG1-0933 (transfer corona)
✓Toner Cartridge:	92295A

Commonly Replaced Parts

AC Power Module	RG9-0319/RG9-0749 RG9-0205 (II/IIID only)
DC Controller	RG1-0710/RG1-0969 (II) RG1-1278 (IIID)/RG1-1970 (IIID)
DC Power Supply	RG1-1394/RG1-2702 (II/III) RG1-0951 (II)/RG1-1310 (IIID) RG1-2007 (IIID)
Delivery Coupler	RG1-0967
High Voltage Power Supply	RG1-0936
Lower Cooling Fan	RH7-1056
Ozone Filter	RF1-2130/RA1-4081 (old style)
Registration Assembly	RG1-0932
Scanner	RG0-0050
SX Cleaning Wand	RG1-0966

HP LaserJet IIP/IIP Plus/IIIP

Model Information

	LJ IIP	LJ IIP Plus/IIIP
Engine Type:	LX	LX
Model Number:	33471A	C2008A/33841A
Release Date:	Sep-89	Oct-91/Apr-91
Max PPM:	4	8
Max DPI:	300	300
Duty Cycle:	6,000 pg/month	8,000 pg/month

✓Fuser, 110V:	RG1-1788
✓Maintenance Kit:	33481-69007
✓Pickup Assembly:	RG1-1792
Delivery Assembly:	RG1-1791
Pickup Roller:	RA1-7573
✓Lower Cassette PU Roller:	RA1-7674 (small, 3 per asm) RA1-7824 (large, 1 per asm)
✓Separation Pad:	RG1-1912
✓Transfer Roller:	RA1-7627
✓Toner Cartridge:	92275A

Commonly Replaced Parts

Delivery Roller	RA1-7708
Delivery Roller Assembly	RG1-1791
DC Controller	RG1-1591
Drum Drive Gear Assembly	RG1-1777
High Voltage Power Supply	RG9-0696/RG1-1597
Laser PCA	RG1-1769
MP Pickup Roller Assembly	RG1-1792
Power Supply	RG1-1782
Scanner Motor Assembly	RG1-1771

HP LaserJet IIISi/4Si

Model Information

	LJ IIISi	LJ 4Si
Engine Type:	NX	NX
Model Number:	33491A	C2010A
Release Date:	Mar-91	Apr-93
Max PPM:	17	17
Max DPI:	300	600
Duty Cycle:	50,000 pg/month	75,000 pg/month

✓Fuser, 110V:	RG5-0046
✓Maintenance Kit:	C2062-67902
✓Pickup Assembly:	RG5-0025
✓Delivery Assembly:	RG5-0381 (job offset)
✓Pickup Roller:	RF5-0041
✓Duplex D Roller:	RF5-0081
Separation Pad:	N/A
✓Transfer Roller:	RG5-0141
✓Toner Cartridge:	92291A

Commonly Replaced Parts

DC Controller	RG5-0627 (4Si only)
Laser Scanner	RG5-0153 (4Si only)
Main Motor Drive Assembly	RG5-0040
Rear Delivery Cover Assembly	RG5-0067
Registration Assembly	RG5-0161
Right Main Block Assembly	RG5-0039
Transfer Clip	RB1-0818

PARTS NOW!

HP Hot Parts List - Monochrome Laser

2005

HP LaserJet 4

Model Information

	LJ 4
Engine Type:	EX
Model Number:	C2001A
Release Date:	Oct-92
Max PPM:	8
Max DPI:	600
Duty Cycle:	20,000 pg/month

✓Fuser, 110V:	RG5-0454
✓Maintenance Kit:	C2001-69012
✓Pickup Assembly:	RG5-0451
✓Delivery Assembly:	RG5-0456
	RG5-0886 (4/4+)
✓Tray 1 Pickup Roller:	RB1-2127/RB1-2205
✓Paper Cassette PU Roller:	RB1-2126/RB1-3477
✓Lower Cassette PU Roller:	RB1-2632
✓Separation Pad:	RF5-0343
✓Transfer Roller:	RF5-0349
✓Toner Cartridge:	92298A

Commonly Replaced Parts

Cartridge Support	RB1-2105
Fan	RH7-1144/RH7-1143
Laser Scanner Assembly	RG5-0449
Main Motor	RH7-1152
Power Supply, 110V	RG5-2499

HP LaserJet 4L/4P

Model Information

	LJ 4L	LJ 4P
Engine Type:	PX	PX
Model Number:	C2003A	C2005A
Release Date:	May-93	Oct-93
Max PPM:	4	4
Max DPI:	300	600
Duty Cycle:	8,000 pg/month	8,000 pg/month

✓Fuser, 110V:	RG5-0676
Maintenance Kit:	N/A
✓Pickup Assembly:	RG5-0668
Delivery Assembly:	RG5-0683 (upper output assembly roller)
Pickup Roller:	RB1-3029
Optional Tray Pickup Roller:	N/A
Separation Pad:	N/A
✓Transfer Roller:	RF5-0596
✓Toner Cartridge:	92274A/R74-2003

Commonly Replaced Parts

DC Controller PCA	RG5-0753 (4L only)
	RG5-0822 (4P only)
Front Oblique Roller	RG5-0669
Input Paper Sensor Arm	RF5-0601
Laser Scanner Assembly	RG5-0662 (4L only)
	RG5-0800 (4P only)
Motor Assembly	RG5-0765
Top Oblique Roller Assembly	RG5-0711

HP LaserJet 4+/5

Model Information

	LJ 4+	LJ 5
Engine Type:	EX+	EX+
Model Number:	C2037A	C3916A
Release Date:	May-94	Apr-96
Max PPM:	12	12
Max DPI:	600	600
Duty Cycle:	20,000 pg/month	20,000 pg/month

✓Fuser, 110V:	RG5-0879
✓Maintenance Kit:	C2037-67910 (4+ only)
	C3916-67901 (5 only)
✓Pickup Assembly:	RG5-0877 (4+ only)
	RG5-2195 (5 only)
✓Delivery Assembly:	RG5-0456/RG5-0886 (4/4+ only)
	RG5-2189 (5 only)
✓Tray 1 Pickup Roller:	RB1-2127/RB1-2205 (4/4+/5)

✓Paper Cassette PU Roller:	RB1-3477 (4/4+ only)
	RB1-2126 (4/4+ only)
	RB1-7911 (5 only)
✓Lower Cassette PU Roller:	RB1-2650 (4+ only)
	RB1-7983 (5 only)
✓Separation Pad:	RF5-0343
✓Transfer Roller:	RF5-0349
✓Toner Cartridge:	92298A

Commonly Replaced Parts

Fan	RH7-1177 (4+)/RH7-1178 (5)
High Voltage Power Supply	RG5-0969
Laser Scanner Assembly	RG5-0903
Main Drive	RG5-0876
Main Motor	RH7-1301
Power Supply, 110V	RG5-2499

PARTS NOW!

HP Hot Parts List - Monochrome Laser

2005

HP LaserJet 4V

Model Information

	LJ 4V
Engine Type:	BX II
Model Number:	C3141A
Release Date:	Sep-94
Max PPM:	16
Max DPI:	600
Duty Cycle:	50,000 pg/month

✓Fuser, 110V:	RG5-1557
✓Maintenance Kit:	C3141-67915
✓Pickup Assembly:	RG5-1391
✓Delivery Assembly:	RG5-0198
✓MP Tray Pickup Roller:	RB1-1411
Paper Cassette Pickup Roller:	RB1-1386
	RG5-1391 (pickup asm)
✓Lower Cassette Pickup Roller:	C3760-60506
✓Separation Pad:	RF5-0302
✓Transfer Roller:	RG5-1410
✓Toner Cartridge:	C3900A

Commonly Replaced Parts

Formatter	C3143-67901
Front Door Assembly	RG5-1552
Paper Guide Plate Assembly	RG5-2248
Protection Guide	RG5-1577/RF5-0327 (foam pad by fuser)

The **PN!** symbol denotes a PARTS NOW! exclusive kit. see page 42 for contents of kits.

HP LaserJet 5L/6L/3100/3150

Model Information

	LJ 5L/6L	LJ 3100/3150
Engine Type:	AX	AX
Model Number:	C3941A/C3090A	C3948A/C7082A
Release Date:	Sep-95/Jul-97	May-98/Feb-00
Max PPM:	4/6	6
Max DPI:	600	600
Duty Cycle:	4,000/6,000 pg/mo.	6,000 pg/month

✓Fixing Film Assembly:	RG5-1964 (5L only)
	RG5-3459 (6L only)
	RG5-4678 (3100/3150 only)
✓Maintenance Kit:	H3971-60001 (5L only)
	H3972-60001 (6L only)
	H3975-60001 (3100/3150 only)
✓Pickup Assembly:	RG5-1951 (5L only)
	RG5-3486 (6L/3100/3150 only)
Delivery Assembly:	RG5-2012 (5L only)
	RG5-3474 (6L/3100/3150 only)
Pickup Roller:	RB2-1634
Optional Tray Pickup Roller:	N/A
✓Separation Pad:	RY7-5077 (kit)
	RY7-5055 (doc. scanner kit)
✓Transfer Roller:	RF5-1534
✓Toner Cartridge:	C3906A/R74-7003

Commonly Replaced Parts

ECU Assembly	RG5-4690 (3100/3150 only)
PN! Feed Kit	KIT-FEED-AX
PN! Fuser Kit, 110V	KIT-FUSER-3100 (3100/3150 only)
LIU Assembly	C3948-60001 (3100/3150 only)
Pressure Roller	RF5-1516 (5L only)
	RF5-2364 (6L/3100/3150 only)

The ✓ symbol denotes parts to stock in addition to the Commonly Replaced Parts.

PARTS NOW!

HP Hot Parts List - Monochrome Laser

2005

HP LaserJet 5P/6P

Model Information

	LJ 5P	LJ 6P
Engine Type:	VX	VX
Model Number:	C3150A	C3980A
Release Date:	Mar-95	Apr-96
Max PPM:	6	8
Max DPI:	300	600
Duty Cycle:	12,000 pg/month	12,000 pg/month

✓Fuser, 110V:	RG5-1700 (5P)/RG5-4110 (6P)
Maintenance Kit:	H3973-60001 (5P only) H3966-60001 (6P only)
✓Tray 1 Pickup Assembly:	RG9-1082 (5P)/RG5-2791 (6P)
✓Tray 2 Pickup Assembly:	RG5-1692 (5P)/RG5-2796 (6P)
Delivery Assembly:	RG5-0683 (upper output roller)
✓Tray 1 Pickup Roller:	RB1-2205 RB1-2127 (4/4+/5/5P/6P)
Tray 2 Pickup Roller:	RB1-6332
✓Separation Pad:	RF5-0343 (4/4+/5/5P/6P)
✓Transfer Roller:	RF5-1290 (5P only) RF5-0596 (4L/4P/6P)
✓Toner Cartridge:	C3903A

Commonly Replaced Parts

DC Controller PCA	RG5-1798 (5P only) RG5-2826 (6P only)
Input Paper Sensor Arm	RB1-6006
Laser Scanner Assembly	RG5-1780 (5P only) RG5-2848 (6P only)
Top Oblique Roller Assembly	RG5-1698

HP LJ 5Si/5Si Mopier/8000

Model Information

	LJ 5Si/5Si Mopier/8000
Engine Type:	WX
Model Number:	C3166A/C4076A/C4085A
Release Date:	Nov-95/Nov-96/May-98
Max PPM:	24
Max DPI:	600
Duty Cycle:	100,000 pg/month

✓Fuser, 110V:	RG5-4447/RG5-1863 RG5-3686
✓Maintenance Kit:	C3971-67903
✓Pickup Assembly:	RG5-1880 (tray 1) RG5-1852 (tray 2 & 3)
✓Delivery Assembly:	RG5-1874
✓Tray 1 Pickup Roller:	RB1-6730
✓Feed/Separation Roller:	RF5-1834/RF5-1426
✓Tray 2 & 3 Pickup Roller:	RF5-1835/RF5-1427
✓Separation Pad:	RF5-1455
✓Transfer Roller:	RG5-1887/RF5-1412
✓Toner Cartridge:	C3909A

Commonly Replaced Parts

DC Controller PCA	RG5-1844
Tray 2/4	R77-0004 (5Si only) R98-1005 (5Si/8000/81xx/85xx)
Tray 3/5	R77-0003 (5Si only) R98-1004 (5Si/8000/81xx/85xx)
Second Pass Roller	RB1-6581

HP LaserJet 1100/3200


Model Information


	LJ 1100	LJ 3200
Engine Type:	22X	22X
Model Number:	C4224A	C7052A
Release Date:	Oct-98	Nov-00
Max PPM:	8	9
Max DPI:	600	1200
Duty Cycle:	7,000 pg/month	7,000 pg/month

✓Fixing Film, 110V:	RG5-4589
✓Maintenance Kit:	H3965-60001
Pickup Assembly:	N/A
Delivery Assembly:	RF5-2830
✓Pickup Roller:	RB2-4026
Optional Tray Pickup Roller:	N/A
Document Scanner Sep Pad:	HB1-3035 (3200 only)

✓Separation Pad:	RF5-2886 (spring is RS5-2502) RY7-5050 (subpad kit)
✓Transfer Roller:	RG5-4657 (w/ left gear)
✓Toner Cartridge:	C4092A

Commonly Replaced Parts

Gear Kit	RY7-5049
Lower Pressure Roller	RF5-2823
Paper Guide Plate	RG5-4582
 Paper Jam Kit	KIT-FEED-1100
Pickup Gear Assembly	RG5-4585
Right Transfer Bushing	RB2-3939

The  symbol denotes a PARTS NOW! exclusive kit. see page 42 for contents of kits.

PARTS NOW!

HP Hot Parts List - Monochrome Laser

2005

HP LJ 1000/1200/1220/33xx

Model Information

	LJ 1000	LJ1200/1220	LJ 3300/3310 3320/3330
Engine Type:	**	**	**
Model Number:	Q1434A	C7044A/C7045A	C9124A/C9709A/ C9125A/CF9126A
Release Date:	Oct-01	May-01	May-02
Max PPM:	10	15	15
Max DPI:	600	1200	1200
Duty Cycle:	7,000 pg/m	10,000 pg/m	10,000 pg/m

** Engine information not available at time of printing

✓Fuser, 110V:	RG9-1493 RG0-1008
PNI ✓Maintenance Kit: Pickup Assembly:	KIT-MAINT-1200 RG0-1085 (1000 only) ✓RG0-1003 (1200/1220 only) RG0-1120 (3300 series only)
Delivery Assembly:	RG0-1010
✓Pickup Roller:	RF0-1008/RL1-0303
Optional Tray Pickup Roller:	N/A
✓Separation Pad:	RF0-1014
✓Transfer Roller:	RG9-1483/RM1-0550
✓Toner Cartridge:	C7115A (2,500 pg.)

Commonly Replaced Parts

ADF Pickup Roller Assembly	C7309-60049 (3300 series only)
ADF Separation Pad	C7309-60009 (3300 series only)
Engine Controller	RG0-1012 (12xx only)
PNI Feed Kit	KIT-FEED-1200-PNO
Formatter	C7857-60001 (12xx only)
Laser Scanner	RG9-1486 (12xx only)
Pickup Gear Assembly	RG0-1020
Pickup Roller, Document	n/a - replace whole unit (1220 only); C7046A is document unit
Separation Pad Kit, Document	RY7-5055 (1220 only)

The **PNI** symbol denotes a PARTS NOW! exclusive kit. see page 42 for contents of kits.

HP LaserJet 1010/1012/1015

Model Information

	LJ 1010	LJ 1012	LJ 1015
Engine Type:	**	**	**
Model Number:	Q2460A	Q2461A	Q2462A
Release Date:	Nov-03	Nov-03	Nov-03
Max PPM:	10	12	12
Max DPI:	1200	1200	1200
Duty Cycle:	5,000 pg/m	5,000 pg/m	5,000 pg/m

** Engine information not available at time of printing

✓Fuser, 110V:	RM1-0649
Maintenance Kit:	N/A
Pickup Assembly:	RM1-0641 RM1-0864
Delivery Assembly:	RM1-0659/RM1-0859 (tray 1)
✓Pickup Roller:	RL1-0266
✓Separation Pad:	RM1-0648
✓Transfer Roller:	RM1-0658
✓Toner Cartridge:	Q2612A

Commonly Replaced Parts

Only parts listed above at the time of printing

The ✓ symbol denotes parts to stock in addition to the Commonly Replaced Parts.

PARTS NOW!

HP Hot Parts List - Monochrome Laser

2005

HP LaserJet 1150/1300

Model Information

	LJ 1150	LJ 1300
Engine Type:	**	**
Model Number:	Q1336A	Q1334A
Release Date:	Apr-03	Apr-03
Max PPM:	18	20
Max DPI:	1200	1200
Duty Cycle:	10,000 pg/month	10,000 pg/month

** Engine information not available at time of printing

✓Fuser, 110V:	RM1-0560
✓Fuser, 220V:	RM1-0561
Maintenance Kit:	KIT-MAINT-1300
Pickup Assembly:	RM1-0531
Delivery Assembly:	RM1-0556
✓Pickup Roller:	RL1-0303
Optional Tray Pickup Roller:	N/A
✓Separation Pad:	RF0-1014
✓Transfer Roller:	RM1-0550
✓Toner Cartridge (2,500 pg.):	Q2613A (1300 only)
✓Toner Cartridge (4,000 pg.):	Q2613X (1300 only)
✓Toner Cartridge (2,500 pg.):	Q2624A (1150 only)

Commonly Replaced Parts

Pickup Roller Shaft	RM1-0533
---------------------	----------

HP LaserJet 2100/2200

Model Information

	LJ 2100	LJ 2200
Engine Type:	32X	32X
Model Number:	C4170A	C7058A
Release Date:	Oct-98	May-01
Max PPM:	10	19
Max DPI:	600	1200
Duty Cycle:	15,000 pg/month	40,000 pg/month

✓Fuser, 110V:	RG5-4132 (2100 only) RG5-5559 (2200 only)
✓Maintenance Kit:	H3974-60001 (2100 only) H3978-60001 (2200 only)
Pickup Assembly:	RG5-4128 (tray 1) RG5-4127 (tray 2; 2100 only) C7058-67903 (tray 2; 2200 only)
Delivery Assembly:	RG5-4119 (2100 only) ✓C7058-67905 (2200 only)
✓Tray 1 Pickup Roller:	RB2-2900
✓Tray 2 Pickup Roller:	RB2-2891 (2100 only) RB2-6304 (2200 only)
✓Separation Pad:	RB2-6348/RF5-3272 (tray 1) RB2-3008 (250-sheet tray 2 & 3) RB2-6474 (500-sheet tray 2 & 3)
✓Transfer Roller:	RG5-4164 (2100) RG5-5581 (2200)
✓Toner Cartridge:	C4096A

Commonly Replaced Parts

Delivery Roller	RF5-2603 (2100 only)
PNI Feed Kit	KIT-FEED-2200 (2200 only)
Fixing Film Assembly	RG5-4134 (2100 only) RG5-5560 (2200 only)
Formatter	C4209-61002 (2200 only)
PNI Fuser Kit	KIT-FUSER-2200 (2200 only)
Laser Scanner	RG5-5591 (2200)
Lower Pressure Roller	RF5-2601 (2100 only) RB2-6368 (2200 only)
Roller Kit	RY7-5052 (2100 only)

The **PNI** symbol denotes a PARTS NOW! exclusive kit. see page 42 for contents of kits.

PARTS NOW!

HP Hot Parts List - Monochrome Laser

2005

HP LaserJet 2300

Model Information

	LJ 2300
Engine Type:	**
Model Number:	Q2472A
Release Date:	Apr-03
Max PPM:	25
Max DPI:	1200
Duty Cycle:	50,000 pg/month

** Engine information not available at time of printing

✓Fuser, 110V:	RM1-0354
✓Fuser, 220V:	RM1-0355
Maintenance Kit:	46180-60001
Pickup Assembly:	RM1-0332
Delivery Assembly:	RM1-0371
✓Tray 1 Pickup Roller:	RC1-0945
✓Tray 2 & 3 Pickup Roller:	RB2-6304
✓Separation Pad:	RC1-0939 (tray 1) RC1-0954 (250-sheet tray) RF5-4258 (500-sheet tray)
✓Transfer Roller:	RM1-0338
✓Toner Cartridge:	Q2610A

Commonly Replaced Parts

DC Controller	RG1-4307
---------------	----------

HP LaserJet 3015/3020/3030 MFP

Model Information

	LJ 3015	LJ 3020	LJ 3030
Engine Type:	**	**	**
Model Number:	Q2669A	Q2665A	Q2666A
Release Date:	Mar-04	Mar-04	Mar-04
Max PPM:	15	15	15
Max DPI:	1200	1200	1200
Duty Cycle:	5,000 pg/m	5,000 pg/m	5,000 pg/m

** Engine information not available at time of printing

✓Fuser, 110V:	RM1-0862
Maintenance Kit:	N/A
Pickup Assembly:	N/A
Delivery Assembly:	RM1-0859 (tray 1)
✓Pickup Roller:	RL1-0266
✓Separation Pad:	RM1-0648
✓Transfer Roller:	RM1-0658
✓Toner Cartridge:	Q2612A

Commonly Replaced Parts

Undetermined at time of printing.

HP LaserJet 3380 MFP

Model Information

	LJ 3380
Engine Type:	**
Model Number:	Q2660A
Release Date:	Mar-04
PPM:	20
Max DPI:	1200
Duty Cycle:	10,000 pg/m

** Engine information not available at time of printing

✓Fuser, 110V:	RM1-0999
Maintenance Kit:	N/A
Pickup Assembly:	RM1-0838
Delivery Assembly:	N/A
✓Pickup Roller:	RL1-0303
✓Separation Pad:	RF0-1014
✓Transfer Roller:	RM1-0550
✓Toner Cartridge:	C7115A (2,500 pg.)

Commonly Replaced Parts

Undetermined at time of printing.

PARTS NOW!

HP Hot Parts List - Monochrome Laser

2005

HP LaserJet 4000/4050

Model Information

	LJ 4000	LJ 4050
Engine Type:	52X	52X
Model Number:	C4118A	C4251A
Release Date:	Nov-97	May-99
Max PPM:	17	17
Max DPI:	1200	1200
Duty Cycle:	65,000 pg/month	65,000 pg/month

✓Fuser, 110V:	RG5-2661
✓Maintenance Kit:	C4118-67909
✓Pickup Assembly:	RG5-2655 (tray 1) RF5-2484 ("D" rollers) RG5-2672 (500-sheet)
Delivery Assembly:	RG5-2648
✓Tray 1 Pickup Roller:	RG5-3718
✓Tray 2 & 3 Pickup Roller:	RB1-8865/RB1-8957
✓Feed/Separation Roller:	RF5-2490/RF5-1885

✓Separation Pad:	RG5-5281
✓Transfer Roller:	RG5-4283
✓Toner Cartridge:	C4127A (6,000 pg.) C4127X (10,000 pg.)

Commonly Replaced Parts

Coupler	RB2-3314
Engine Controller, 110V	RG5-3693
Feed/Registration Sensor Asm	RG5-2642
Fuser Film Assembly, 110V	RG5-4290
Laser Scanner Assembly	RG5-2641
Lower Pickup Drive Asm	RG5-2684 (250-sheet "T" ver.)
Lower Pressure Roller	RB9-0684/RB1-8794
Registration Assembly	RG5-2652 (4000 upgrade)
Separation Clutch	RB1-8974
Upper Pickup Drive Asm	RG5-2683 (250-sheet "T" ver.)

HP LaserJet 4100

Model Information

	LJ 4100
Engine Type:	**
Model Number:	C8049A
Release Date:	May-01
Max PPM:	25
Max DPI:	1200
Duty Cycle:	150,000 pg/month

** Engine information not available at time of printing

✓Fuser, 110V:	RG5-5063
✓Maintenance Kit:	C8057A/C8057-67903
Pickup Assembly:	RG5-5084 (tray 1) RG5-5277 (tray 2)
✓Delivery Assembly:	RG5-5094
✓Tray 1 Pickup Roller:	RG5-3718
✓Tray 2 & 3 Pickup Roller:	RB1-8957
✓Feed/Separation Roller:	RF5-3114
✓Separation Pad:	RF5-3086
✓Transfer Roller:	RG5-5295
✓Toner Cartridge:	C8061A (6,000 pg.) C8061X (10,000 pg.)

Commonly Replaced Parts

Laser Scanner Assembly	RG5-5100
------------------------	----------

HP LaserJet 4200/4300

Model Information

	LJ 4200	LJ 4300
Engine Type:	**	**
Model Number:	Q2425A	Q2431A
Release Date:	Nov-02	Nov-02
Max PPM:	35	45
Max DPI:	1200	1200
Duty Cycle:	150,000 pg/month	200,000 pg/month

** Engine information not available at time of printing

✓Fuser, 110V:	RM1-0013 (4200)/RM1-0101 (4300)
✓Maintenance Kit:	Q2429-69001 (4200) Q2436-69001 (4300)
Pickup Assembly:	RM1-0004 (tray 1)
Delivery Assembly:	RM1-0026
✓Tray 1 Pickup Roller:	RL1-0019
✓Tray 2 Pickup Roller:	RM1-0036
✓Tray 2 Feed/Sep Roller:	RM1-0037
✓Separation Pad:	RL1-0007
Transfer Roller:	RM1-0699
✓Toner Cartridge:	Q1338A (4200)/Q1339A (4300)

Commonly Replaced Parts

Face Down Delivery Roller	RM1-0371
Power Supply, 110V	RM1-0019 (4200 only)
Transfer Assembly	RM1-0007

PARTS NOW!

HP Hot Parts List - Monochrome Laser

2005

HP LaserJet 5000/5100

Model Information

	LJ 5000	LJ 5100
Engine Type:	62X	62X
Model Number:	C4110A	C1860A
Release Date:	Mar-98	May-02
Max PPM:	16	21
Max DPI:	1200	1200
Duty Cycle:	65,000 pg/month	65,000 pg/month

✓Fuser, 110V:	RG5-5455 (5000 only) RG5-7060 (5100 only)
Maintenance Kit:	C4110-67914 (5000 only) Q1860-67902 (5100 only)
Pickup Assembly:	RG5-3519 (tray 1)/RG5-3521 (tray 2)
Delivery Assembly:	RG5-3542
✓Tray 1 Pickup Roller:	RB2-1820
✓Tray 2 & 3 PU Roller:	RB2-1821

"D" Roller:	RB1-8865
✓Separation Pad:	RF5-3439 (tray 1)/RG9-1485 (tray 2)
✓Transfer Roller:	RG5-3579
✓Toner Cartridge:	C4129X

Commonly Replaced Parts

Coupler/Pickup Roller	RB1-8877 (5000 only) C4119-67902 (coupler kit)
Display Cover	RB2-1758
PNI Feed Kit	KIT-FEED-5000
Feed/Separation Rollers	RF5-2634
Tray 1 Separation Pad Kit	RF5-4117 (sub pads)

HP LaserJet 8100/8150

Model Information

	LJ 8100	LJ 8150
Engine Type:	72X	72X
Model Number:	C4214A	C4265A
Release Date:	Oct-98	Nov-00
Max PPM:	32	32
Max DPI:	600	600
Duty Cycle:	150,000 pg/month	150,000 pg/month

✓Fuser, 110V:	RG5-6532/RG5-4318
✓Maintenance Kit:	C3914A
✓Pickup Assembly:	RG5-4330 (tray 1) RG5-4334 (tray 2 & 3)
✓Delivery Assembly:	RG5-1874
✓Tray 1 Pickup Roller:	RB1-9526
✓Tray 2 & 3 Pickup Roller:	RF5-2708
✓Feed/Separation Roller:	RF5-1834
✓Separation Pad:	RF5-2703 (tray 1)
✓Transfer Roller:	RF9-1394
✓Toner Cartridge:	C4182X

Commonly Replaced Parts

Pressure Roller	RB2-3522
Registration Assembly	RG5-4303
Torque Limiter	RB2-3581

The **PNI** symbol denotes a PARTS NOW! exclusive kit. see page 42 for contents of kits.

HP LaserJet 9000

Model Information

	LJ 9000
Engine Type:	**
Model Number:	C8519A
Release Date:	May-01
Max PPM:	50
Max DPI:	1200
Duty Cycle:	300,000 pg/month

** Engine information not available at time of printing

✓Fuser, 110V:	RG5-5750
✓Maintenance Kit:	C9152A
Pickup Assembly:	RG5-5681
Delivery Assembly:	RG5-5643
✓Feed/Separation Roller:	RF5-3338
✓Tray 2 & 3 Pickup Roller:	RF5-3340
✓Optional Tray 1 Roller:	RF5-3403
Separation Pad:	N/A
✓Transfer Roller:	RG5-5662
✓Toner Cartridge:	C8543X

Commonly Replaced Parts

2000-Sheet Feeder Drive	RG5-6228
Paper Cassette, Tray 2 or 3	RG5-5635
Paper Path Connection Asm (Tray 4)	RG5-6227
Tray 1 Separation Roller	RF5-3404

The ✓ symbol denotes parts to stock in addition to the Commonly Replaced Parts.

PARTS NOW!

HP Hot Parts List - Color Laser

2005

HP Color LaserJet/Color LaserJet 5

Model Information

Color LJ/Color LJ 5
Engine Type: Konica
Model Number: C3100A/C3961A
Release Date: Sep-94/Mar-96
Max PPM: 2/10 (color/monochrome)
Max DPI: 300
Duty Cycle: 15,000/30,000 pg/month

✓Fuser, 110V: C3969A#110
✓Fuser, 220V: C3969-67902
✓Maintenance Kit: C3967A (print drum)
C3968A (transfer belt asm)
C3964A (coating kit)
Pickup Assembly: N/A
Delivery Assembly: 07BA-5005KC

Pickup Roller: 07BA-4062KC
Optional Tray Pickup Roller: N/A
Separation Pad: N/A
✓Transfer Roller: C3968A (transfer belt asm)
✓Toner Cartridge, Black: C3105A
✓Toner Cartridge, Cyan: C3102A
✓Toner Cartridge, Magenta: C3104A
✓Toner Cartridge, Yellow: C3103A

Commonly Replaced Parts

Developer, Black: C3965A
Developer, Color: C3966A
Toner Collection Kit: C3120A

HP Color LaserJet 1500/2500/2550

Model Information

	CLJ 1500	CLJ 2500
Engine Type:	**	**
Model Number:	C9706A	Q2489A
Release Date:	May-03	Jul-02
Max PPM:	4/16***	4/16***
Max DPI:	600	600
Duty Cycle:	30,000 pg/month	30,000 pg/month

CLJ 2550
Engine Type: **
Model Number: Q3702A
Release Date: June-04
Max PPM: 4/20***
Max DPI: 2400
Duty Cycle: 30,000 pg/month

* Utilizes HP's Image REt 2400 technology
** Engine information not available at time of printing
*** Color PPM/Monochrome PPM

✓Fuser, 110V: RG5-6903 (1500/2500 only)
RG5-7572 (2550 only)
✓Maintenance Kit: KIT-MAINT-2500-PNO
(1500/2500 only)
Pickup Assembly: RG5-6952 (tray 1)
Delivery Assembly: RG5-6897 (upper top bin)
RG5-6936 (lower top bin,
1500/2500 only)
RG5-7595
(lower top bin, 2550 only)

✓Tray 1 Pickup Roller: RB3-0160
✓Tray 2 & 3 Pickup Roller: RB3-0161 (1500/2500 only)
✓Separation Pad: RF5-4012 (tray 1)
RG5-6899 (1500/2500 only)
✓Transfer Roller: RF5-4040 (1500/2500 only)
RF5-4067 (2550 only)
✓Toner Cartridge, Black: C9700A (1500/2500 only)
Q3960A (5,000 pg, 2550 only)
✓Toner Cartridge, Cyan: C9701A (1500/2500 only)
Q3961A (4,000 pg, 2550 only)
Q3971A (2,000 pg, 2550 only)
✓Toner Cartridge, Magenta: C9703A (1500/2500 only)
Q3962A (4,000 pg, 2550 only)
Q3972A (2,000 pg, 2550 only)
✓Toner Cartridge, Yellow: C9702A (1500/2500 only)
Q3963A (4,000 pg, 2550 only)
Q3973A (2,000 pg, 2550 only)

Commonly Replaced Parts

Imaging Drum: C9704A (1500/2500 only)
Q3964A (2550 only)

PARTS NOW!

HP Hot Parts List - Color Laser

2005

HP Color LaserJet 3500/3700

Model Information

	CLJ 3500	CLJ 3700
Engine Type:	**	**
Model Number:	Q1319A	Q1321A
Release Date:	Mar-04	Mar-04
Max PPM:	12	16
Max DPI:	2400*	2400*
Duty Cycle:	45,000 pg/month	55,000 pg/month

* Utilizes HP's Image REt 2400 technology

** Engine information not available at time of printing

✓ Fuser, 110V:	RM1-0428
✓ Maintenance Kit:	Q3655A (fuser kit) Q3658A (transfer kit)
Pickup Assembly:	RM1-0760 (3500 only) RM1-0449 (3700 only)
Delivery Assembly:	RM1-0469
✓ Tray 1 Pickup Roller:	RC1-1535
✓ Tray 2 & 3 Pickup Roller:	RM1-0731
✓ Separation Pad:	RC1-0939 (tray 1) RC1-0954 (tray 2)
✓ Transfer Roller:	RM1-0740
✓ Toner Cartridge, Black:	Q2670A
✓ Toner Cartridge, Cyan:	Q2671A (3500 only) Q2681A (3700 only)
✓ Toner Cartridge, Magenta:	Q2672A (3500 only) Q2682A (3700 only)
✓ Toner Cartridge, Yellow:	Q2673A (3500 only) Q2683A (3700 only)

Commonly Replaced Parts

Undetermined at time of printing.

HP Color LaserJet 4500/4550

Model Information

	CLJ 4500/4550
Engine Type:	83X
Model Number:	C4084A/C7085A
Release Date:	Oct-98/Nov-00
Max PPM:	4/16 (color/monochrome)
Max DPI:	2400*
Duty Cycle:	35,000 pg/month

* Utilizes HP's Image REt 2400 technology

✓ Fuser, 110V:	RG5-5154
✓ Maintenance Kit:	C4197A (fuser, 110V) C4198A (fuser, 220V) C4195A (drum) C4196A (transfer)
Pickup Assembly:	N/A
Delivery Assembly:	RG5-5135
✓ Tray 1 Pickup Roller:	RB2-0717 (backing piece is RB2-0744)
✓ Tray 2 & 3 Pickup Roller:	RB1-8865
✓ Tray 2 Feed/Separation Roller:	RF5-1885
✓ Tray 2 Feed Roller:	RF5-2092
Separation Pad:	RB2-0734 (MP tray)
✓ Transfer Roller:	C4196A (transfer kit)
✓ Toner Cartridge, Black:	C4191A
✓ Toner Cartridge, Cyan:	C4192A
✓ Toner Cartridge, Magenta:	C4193A
✓ Toner Cartridge, Yellow:	C4194A

Commonly Replaced Parts

PN! Feed Kit	KIT-FEED-4500
Fuser Deflector Kit	C4084-67911 (to repair deflector on back of fuser)
ITB Drawer Assembly	RG5-5120 RG5-3190
Separation Clutch	RB1-8974
Toner Carousel Kit	C4084-67909 1 replacement toner flap, labels and springs
Transfer Roller Assembly	RF5-2112

Note: There are 2 versions of the 4500 and not all parts interchange between versions.

Version 1 - serial numbers JPAxxxxxxx - JPGxxxxxxx

Version 2 - serial numbers JPHxxxxxxx - JPZxxxxxxx

Refer to your service manual for the correct part #'s.

The **PN!** symbol denotes a PARTS NOW! exclusive kit. see page 42 for contents of kits.

PARTS NOW!

HP Hot Parts List - Monochrome Laser

2005

HP Color LaserJet 4600/4650

Model Information

	CLJ 4600/4650
Engine Type:	**
Model Number:	C9660A/Q3668A
Release Date:	May-02/June-04
Max PPM:	17/17 (4600) / 22/22 (4650)
Max DPI:	2400*/3600*
Duty Cycle:	85,000 pg/month

* Utilizes HP's Image REt 2400 (4600) and 3600 (4650) technology

** Engine information not available at time of printing

*** Color PPM/Monochrome PPM

✓Fuser, 110V:	RG5-6493 (4600 only) RG5-7450 (4650 only)
✓Maintenance Kit:	C9725A (fuser, 4600 only) C9724A (transfer, 4600 only) C3676A (fuser, 4650 only) C3675A (transfer, 4650 only)
✓Pickup Assembly:	RG5-6468 (4600 only) RG5-7453 (4650 only)
Delivery Assembly:	N/A
✓Tray 1 Pickup Roller Asm:	RG9-1529
✓Tray 2 & 3 Pickup Roller:	RF5-3739
✓Tray 1 Separation Pad:	RF5-3750
Transfer Roller:	N/A
✓Toner Cartridge, Black:	C9720A
✓Toner Cartridge, Cyan:	C9721A
✓Toner Cartridge, Magenta:	C9723A
✓Toner Cartridge, Yellow:	C9722A

Commonly Replaced Parts

ElectrostaticTransfer Belt Asm	RG5-6484
Fuser Cover, Left	RF5-3774
Fuser Cover, Right	RF5-3775
Fuser Flag Sensor	RB2-8498

HP Color LaserJet 5500

Model Information

	CLJ 5500
Engine Type:	**
Model Number:	C9656A
Release Date:	Nov-02
Max PPM:	21/21 (color/monochrome)
Max DPI:	2400*
Duty Cycle:	120,000 pg/month

* Utilizes HP's Image REt 2400 technology

** Engine information not available at time of printing

✓Fuser, 110V:	RG5-6848
✓Maintenance Kit:	C9735A (fuser) C9734A (transfer) RY7-5097 (roller)
Pickup Assembly:	RG5-6670
Delivery Assembly:	N/A
✓Tray 1 Pickup Roller:	RG9-1529
✓Tray 2 & 3 Pickup Roller:	RF5-3340 (in roller kit)
✓Tray 2 & 3 Feed/Sep. Roller	RF5-3338 (in roller kit)
✓Tray 1 Tray Separation Pad:	RF5-3865
Transfer Roller:	N/A
✓Toner Cartridge, Black:	C9730A
✓Toner Cartridge, Cyan:	C9731A
✓Toner Cartridge, Magenta:	C9733A
✓Toner Cartridge, Yellow:	C9732A

Commonly Replaced Parts

Undetermined at time of printing.

PARTS NOW!

HP Hot Parts List - Monochrome Laser

2005

HP Color LaserJet 8500/8550

Model Information

	CLJ 8500/8550
Engine Type:	82X
Model Number:	C3983A/C7096A
Release Date:	Oct-98/Apr-00
Max PPM:	6/24 (color/monochrome)
Max DPI:	2400*
Duty Cycle:	60,000 pg/month

* Utilizes HP's Image REt 2400 technology

✓Maintenance Kit:	C4155A (fuser, 110V) C4153A (drum) C4154A (transfer)
Pickup Assembly:	RG5-3054 (tray 1) RG5-3132 (tray 2 & 3)
Delivery Assembly:	RG0-0110
✓Tray 1 Pickup Roller:	RB1-9526
✓Tray 2 & 3 Pickup Roller:	RF5-1834
✓Tray 1 Separation Pad:	RF5-1989
✓Transfer Roller Kit:	C4154A
✓Toner Cartridge, Black:	C4149A
✓Toner Cartridge, Cyan:	C4150A
✓Toner Cartridge, Magenta:	C4151A
✓Toner Cartridge, Yellow:	C4152A

Commonly Replaced Parts

PN! Feed Kit	KIT-FEED-8500
ICL Arm Kit	RG9-1527
Paper Feed Assembly	RG5-3854 (2000-sheet feeder)
PEP Kit	RG9-1495

The **PN!** symbol denotes a PARTS NOW! exclusive kit. see page 42 for contents of kits.

HP Color LaserJet 9500

Model Information

	CLJ 9500
Engine Type:	**
Model Number:	C8546A
Release Date:	Mar-04
Max PPM:	24
Max DPI:	4800*
Duty Cycle:	200,000 pg/month

* Utilizes HP's Image REt 4800 technology

** Engine information not available at time of printing

✓Fuser, 110V:	RG5-6098
✓Maintenance Kit:	C8556A (fuser) C8555A (transfer) C8554A (cleaning)
Pickup Assembly:	RG5-6196
Delivery Assembly:	RG5-6017
✓Tray 1 Pickup Roller:	RB2-1820
✓Tray 2 & 3 Pickup Roller:	RF5-3340
✓Tray 1 Feed/Separation Roller:	RF5-3490
✓Tray 2 & 3 Feed/Sep. Roller:	RF5-3338
Separation Pad:	N/A
✓Transfer Roller:	RG5-6178
✓Toner Cartridge, Black:	C8550A C8560A (image drum)
✓Toner Cartridge, Cyan:	C8551A C8561A (image drum)
✓Toner Cartridge, Magenta:	C8552A C8562A (image drum)
✓Toner Cartridge, Yellow:	C8553A C8563A (image drum)

Commonly Replaced Parts

Image Drum, Black	C8560A
Image Drum, Cyan	C8561A
Image Drum, Magenta	C8562A
Image Drum, Yellow	C8563A

The ✓ symbol denotes parts to stock in addition to the Commonly Replaced Parts.

Lexmark Hot Parts List



PARTS NOW!

Lexmark At-A-Glance Hot Parts List

2005

	LP 4019	LP 4029	LP 4039	Optra E	
Fuser, 110V:	1381889	1381889 (ver. 01x) 1383522	1381626 (10R/10P only) 1381639 (12 only) (ver. 02x, 03x, 04x)	69G8312 (120V, 06A, 06B, 06D, 070) 11A7390 (120V, 06C, 06F, 071) 1381640 (16 only)	
Maintenance Kit:	N/A	N/A	1325531 (12L/12R only) 1329140 (16 only)	N/A	
Right Rail Assembly:	1381098	1381098	1381950	69G8368 (PU asm, 06A, 06B, 06D, 070) 11A7384 (PU asm, 06C, 06F, 071)	
Delivery Assembly:	1039055	1039055	1381895 (12L/16 only) 1381897 (10R/10+ only)	69G8336 (06A, 06B, 06D, 070) 11A7465 (06C, 06F, 071)	
Pickup Roller:	1368647	1368647	1381549 (10R/12/16) 69G5480 (10+/12C)	69G8375	
Opt. Tray PU Roller:	1039538	1039538	1039540 (500-sheet)	69G9956	
Separation Pad:	N/A	N/A	N/A	69G8373 (06A, 06B, 06D, 070) 11A7459 (06C, 06F, 071)	
Transfer Roller:	1383387 (corona)	1383387 (corona)	1381008	N/A	
Toner Cartridge:	1380200	1380200	1380850	69G8256	
	Optra E310	Optra E312	Optra M410	Optra M412	Optra N240/45
Fuser, 110V:	12G0074	12G1935	12G3982 (115V)	12G3984	11A8233 (110V)
Maintenance Kit:	KIT-MAINT-E310	N/A	KIT-MAINT-M410	KIT-MAINT-M412	11A8122
Pickup Assembly:	12G0070	12G1889	N/A	N/A	RG5-1852
Delivery Assembly:	12G0084	12G0084	12G0308 (lower roller) 12G0307 (upper roller)	12G0308 (lower roller) 12G0307 (upper roller)	RG5-1874
Pickup Roller:	12G0067	12G1933	12G0323	12G0323	11A8155 (kit) 11A8184 (MP tray roller & sep. pad)
Opt. Tray PU Roller:	N/A	N/A	12G0299 (MP tray) 12G0399 (500-sheet)	12G0299	N/A
Separation Pad:	12G0062	12G0062	N/A	N/A	11A8184 (MP tray roller & sep. pad)
Transfer Roller:	12G0048	12G0048	12G0354	12G0354	1382226/RF5-1412
Toner Cartridge:	13T0101	13T0101	4K00199	17G0154	1382140
	Optra R/Rt/L	Optra Rx/R+/Rt+/Lx	Optra S 12xx	Optra S 16xx/1855	Optra S 24xx
Fuser, 115V:	1381639	1381640	99A1185	99A0966	99A1190
Maintenance Kit:	1325531	69G5264/1329140	N/A	99A0967	99A1195
Pickup Assembly:	1381801	1381801	99A1056	99A1056	99A1056
Delivery Assembly:	1381895 (all L's) 1381899 (all R's)	1381895 (all L's) 1381899 (all R's)	99A0135	99A0135	99A0135
Pickup Roller:	69G5480	69G5480	99A0070 (tray 1)	99A0070 (tray 1)	99A0070 (tray 1)
Opt. Tray PU Roller:	1039540	1039540	99A0076 (MP tray)	99A0076 (MP tray)	99A0076 (MP tray)
Separation Pad:	N/A	N/A	99A0083 (MP tray)	99A0083 (MP tray)	99A0083 (MP tray)
Transfer Roller:	1381008/1381922	1381008/1381922	99A0179/99A1015	99A0179/99A1015	99A0179/99A1015
Toner Cartridge:	1382100	1382100	1382920	1382920	1382920

PARTS NOW!

Lexmark At-A-Glance Hot Parts List

2005

	Optra S 3455	Optra T610/12	Optra T614/16	Optra W810	E210
Fuser, 115V:	99A1192	99A1969	99A1977	12G2221 (110V)	12G6773
Maintenance Kit:	99A1197	99A1970/99A1971	99A1978	12G3421 (fuser kit)	N/A
Pickup Assembly:	99A1056	99A1056	99A1530	N/A	N/A
Redrive Assembly:	99A0135	99A1586 (610/612) (250-sheet) 99A1604 (612) (500-sheet)	99A1533	N/A	N/A
Pickup Roller:	99A0070 (tray 1)	99A0070 (tray 1)	99A0070 (tray 1)	12G2475	56P2501
Opt. Tray PU Roller:	99A0076 (MP tray)	99A0076 (MP tray)	99A0076 (MP tray)	12G2562	N/A
Separation Pad:	99A0083 (MP tray)	99A0083 (MP tray)	99A0083 (MP tray)	12G2450 (tray 1)	12G6779 (main) 12G6785 (left) 12G6786 (right)
Transfer Roller:	99A0179/99A1015	99A1015/99A0179	99A1015/99A0179	12G3425 (transfer kit)	12G6770
Toner Cartridge:	12A0825	12A5840	12A5840	12L0250	10S0150
	E232/330/332	E320/22	E321/23	T420	T520/22
Fuser, 110V:	56P1810	12G4484	56P1053	56P0648	99A2423
Maintenance Kit:	N/A	N/A	N/A	N/A	56P1036
Pickup Assembly:	N/A	12G4481	12G4481	56P0657 (MFP)	99A2157 (520) 99A2079 (522)
Redrive Assembly:	N/A	12G4493	12G4493	N/A	99A2151 (250-sheet) 99A2029 (500-sheet)
Pickup Roller:	56P1820	12G4483	12G4483	56P0656	99A0070 (all trays)
Opt. Tray PU Roller:	N/A	12G4532	12G4532	56P0613	99A0076 (MP tray)
Separation Pad:	N/A	N/A	N/A	56P0611 (lower housing asm)	99A0083
Transfer Roller:	56P1823	12G4470	12G4470	56P0643	99A1015/99A0179
Toner Cartridge:	12A8300	08A0475	12A7300	12A7310	12A6730
	T620	T622	T630/32/34	W812	W820
Fuser, 115V:	99A2402	99A2405	56P1333 (630/632) 56P1859 (634)	56P0884 (120V, fuser kit)	12G4184 (LV)
Maintenance Kit:	99A2408	99A2411	56P1409 (630/632) 56P1855 (634)	56P0884 (fuser kit)	12G4182
Pickup Assembly:	99A2444	99A2444	56P1326 (250-sheet) 56P1325 (500-sheet)	56P0847	N/A
Redrive Assembly:	99A1533	99A1533	99A2151 (250-sheet) 56P1328 (500-sheet)	N/A	N/A
Pickup Roller:	99A0070 (all trays)	99A0070 (all trays)	99A0070 (all trays)	56P0800 (all trays)	12G4031 (kit)
Opt. Tray PU Roller:	99A0076 (MP tray)	99A0076 (MP tray)	99A0076 (MP tray)	56P0841	N/A
Separation Pad:	99A0083	99A0083	56P1352	56P0838 (all trays)	N/A
Transfer Roller:	99A1015/99A0179	99A1015/99A0179	56P1357	56P0878	12G4062
Toner Cartridge:	12A6865	12A6865	12A7362	14K0050	12B0090

PARTS NOW!

Lexmark At-A-Glance Hot Parts List

2005

	Optra C	Optra C1200	Optra C710	C510
Fuser, 115V:	11A2470 (110V)	11G0375	12G1698 (110V)	20K0506 (fuser kit)
Maintenance Kit:	11A2374	11G0601	10E0049 (fuser w/ filter)	N/A
Pickup Assembly:	N/A	N/A	N/A	N/A
Redrive Assembly:	11A2236	11G0135	12G1389	N/A
Pickup Roller:	11A2218	11G0271	12G1379	56P1655 (cassette)
Opt. Tray PU Roller:	11A2231 (MP tray)	11G0282 (MP tray)	N/A	N/A
Separation Pad:	11A2232 (MP tray)	N/A	12G1641 (tray 1) 12G1639/12G7099 (MP tray)	56P1656
Transfer Roller:	N/A	11G0202 (belt)	12G1382	56P1660
Toner Cartridge:	1361210 (K)	12A1454 (K)	10E0043 (K, w/ coating roller)	20K1403 (K)
	1361211 (C)	12A1452 (C)	10E0040 (C)	20K1400 (C)
	1361212 (M)	12A1451 (M)	10E0041 (M)	20K1401 (M)
	1361213 (Y)	12A1453 (Y)	10E0042 (Y)	20K1402 (Y)
	C720	C750/C752	Optra SC 1275	C910/912
Fuser, 115V:	15W0908 (fuser kit)	12G6301	12C0575 11C0152 (110V)	56P9751 (120V)
Maintenance Kit:	12G7220	12G6496 (fuser kit) 56P1296 (transfer kit)	12C0575	56P9900 (fuser kit) 56P9903 (transfer kit)
Pickup Assembly:	N/A	12G6427	N/A	N/A
Redrive Assembly:	12G7168	12G6492	12C0668 (upper roller) 12C0669 (lower roller)	56P9559
Pickup Roller:	12G7098	99A0070	18A0492	56P9511
Opt. Tray PU Roller:	N/A	N/A	12C0025 (bin 1)	56P9971 (MP frame asm)
Separation Pad:	12G7099	N/A	12C0016	N/A
Transfer Roller:	12G7004	12G6303	12C0014	56P9694
Toner Cartridge:	15W0903 (K)	10B042K (K)	1361751 (K)	12N0771 (K)
	15W0900 (C)	10B042C (C)	1361752 (C)	12N0768 (C)
	15W0901 (M)	10B042M (M)	1361753 (M)	12N0769 (M)
	15W0902 (Y)	10B042Y (Y)	1361754 (Y)	12N0770 (Y)

LaserPrinter 4019 series

Model Information

	LaserPrinter 4019
Engine Type:	4019
Model Number:	4019-001
Release Date:	Aug-89/Mar-90
Max PPM:	10
Max DPI:	300
Duty Cycle:	12,000 pg/month

✓Fuser, 110V:	1381889 (without solenoid)
Maintenance Kit:	N/A
Pickup Assembly:	1381098 (right rail assembly)
Delivery Assembly:	1039055
Pickup Roller:	1368647
500-sheet Tray Pickup Roller:	1039538
Separation Pad:	N/A
✓Transfer Roller:	1383387 (transfer corona)
✓Toner Cartridge:	1380200

Commonly Replaced Parts

"D" Roller Tire	69G5480
Bellcrank Parts Packet	1383320
Cleaning Wand	1380785
Fan Assembly	1383998
Lower Pressure Roller	1329928
Upper Fuser Roller	1383322

LaserPrinter 4029 series (10/20/30/40 models)

Model Information

	LaserPrinter 4029 (10/20/30/40 models)
Engine Type:	4029
Model Number:	4029-010/4029-02x/4029-030/4029-04x
Release Date:	Sep-91
Max PPM:	10
Max DPI:	600
Duty Cycle:	14,000 pg/month

✓Fuser, 110V:	1381889 (ver. 01x)	1383522 (ver. 02x, 03x, 04x)
	0xx number is located on the lower front right cover.	
Maintenance Kit:	N/A	
Pickup Assembly:	1381098 (right rail assembly)	
Delivery Assembly:	1039055	
Pickup Roller:	1368647	
500-sheet Tray Pickup Roller:	1039538	
Separation Pad:	N/A	
✓Transfer Roller:	1383387 (transfer corona)	
✓Toner Cartridge:	1380200	

Commonly Replaced Parts

"D" Roller Tire	69G5480
Bellcrank Parts Packet	1383320
Cleaning Wand	1380785
Fan Assembly	1383998
Upper Fuser Roller	1383322
Lower Pressure Roller	1329928

Optra E

Model Information

	Optra E
Engine Type:	4026
Model Number:	4026-0xx
Release Date:	1996
Max PPM:	6
Max DPI:	600
Duty Cycle:	10,000

✓Fuser, 120V:	69G8312 (06A, 06B, 06D, 070)	11A7390 (06C, 06F, 071)
Maintenance Kit:	N/A	
Pickup Assembly:	69G8368 (06A, 06B, 06D, 070)	11A7384 (06C, 06F, 071)
Delivery Assembly:	69G8336 (06A, 06B, 06D, 070)	

Pickup Roller:	69G8375
Opt. Tray Pickup Roller:	69G9956
Separation Pad:	69G8373 (06A, 06B, 06D, 070)
	11A7459 (06C, 06F, 071)
✓Transfer Roller:	N/A
✓Toner Cartridge:	69G8256

Commonly Replaced Parts

Transfer Assembly	69G8307 (06A, 06B, 06D, 070)
	11A7452 (06C, 06F, 071)
Photo Conductor	19G8257

LaserPrinter 4039 series (10/12/16 series)

Model Information

	10R/10 Plus	12R/12R Plus
Engine Type:	4039	4039
Model Number:	4039-10R/4039-10P	4039-12R
Release Date:	Apr-93	Apr-93/Apr-94
Max PPM:	10	12
Max DPI:	600	600
Duty Cycle:	25,000 pg/mo.	35,000 pg/mo.

	12C/12C Plus	12L/12L Plus
Engine Type:	4039	4039
Model Number:	4039-12C	4039-12L
Release Date:	Apr-93/Apr-94	Apr-93/Apr-94
Max PPM:	12	12
Max DPI:	600	600
Duty Cycle:	35,000 pg/mo.	50,000 pg/mo.

	16L/16L Plus
Engine Type:	4039
Model Number:	4039-16L
Release Date:	Apr-93/Apr-94
Max PPM:	16
Max DPI:	600
Duty Cycle:	75,000 pg/mo.

✓ Fuser, 110V:	1381626 (10R/10P only) 1381639 (12C/12R/12L) 1381640 (16L only)
Maintenance Kit:	1325531 (12L/12R) 1329140 (16L only)
✓ Pickup Assembly:	1381950 (right rail assembly)
✓ Redrive Assembly:	1381895 (12L/16L only) 1381897 (10R/10P only)
✓ "D" Roller Assembly:	1381549 (10R/12R/12L/12C/ 16L only), narrow roller 69G5480 (10 Plus/12C only), wide roller
Optional Tray Pickup Roller:	1039540
Separation Pad:	N/A
✓ Transfer Roller:	1381008
✓ Toner Cartridge:	1380850 (7,000 pgs.) 1380950 (12,800 pgs.)

Commonly Replaced Parts

Bellcrank Parts Packet	1381145
Plenum	1328222 (12R/12L/12C/16L/ 10R/10 Plus only)

Optra E310/312

Model Information

	Optra E310/312
Engine Type:	4044
Model Number:	4044-001/4044-201
Release Date:	Jul-02/Jul-02
Max PPM:	8/10
Max DPI:	1200*
Duty Cycle:	10,000 pg/month

*Utilizes Lexmark's Image Quality Enhancement technology

✓ Fuser, 110V:	12G0074 (310 only) 12G1935 (312 only)
Maintenance Kit:	KIT-MAINT-E310 (310 only)
Pickup Assembly:	12G0070 (310 only) 12G1889 (312 only)
Delivery Assembly:	12G0084
✓ Pickup Roller:	12G0067 (310 only) 12G1933 (312 only)
Optional Tray Pickup Roller:	N/A
✓ Separation Pad:	12G0062
✓ Transfer Roller:	12G0048
✓ Toner Cartridge:	13T0101

Commonly Replaced Parts

Fan	12G0128
Friction Pad, Right	12G1932 (312 only) 12G0120 (310 only)
Friction Pad, Left	12G1931 (312 only) 12G0119 (310 only)
Fuser Exit Roller	12G0156
Pickup Roller Clutch	12G0065
Pressure Roller	12G0086

PARTS NOW!

Lexmark Hot Parts List - Monochrome Laser

2005

Optra R/L

Model Information

	Optra R/Rt	Optra R+/Rt+/Lx/Lx+	Optra Rx	Optra L	Optra Lxi+
Engine Type:	4049	4049	4049	4049	4049
Model Number:	4049-12R/4049-12T	4049-RAO/4049-RBO 4049-16L/4049-LMO	4049-16R	4049-12L	4049-LMI
Release Date:	Oct-94	Sep-96/Sep-95 Oct-94/Sep-95	Oct-94	Oct-94	Sep-95
Max PPM:	12/16	16	12	12/16	16
Max DPI:	1200	1200	1200	1200	1200
Duty Cycle:	25,000 pg/month	35,000 pg/month	40,000 pg/month	50,000 pg/month	75,000 pg/month

✓ Fuser, 110V:	1381639 (R/Rt/L only) 1381640 (Rx/R+/Rt+/Lx series only)
✓ Maintenance Kit:	1325531 (R/Rt/L only) 69G5264/1329140 (Rx/R+/Rt+/Lx series only)
✓ Pickup Assembly:	1381801 (right rail asm w/ gears)
✓ Redrive Assembly:	1381895 (all L's) 1381899 (all R's)
✓ "D" Pickup Roller Asm:	69G5480 (standard cassette)
Opt. Tray Pickup Roller:	1039540 (500-sheet)

Separation Pad:	N/A
✓ Transfer Roller:	1381008/1381922
✓ Toner Cartridge:	1382100 (7,000 pgs.) 1382150 (14,000 pgs.)

Commonly Replaced Parts

"D" Roller Tire	1381842 (optional 250-sheet tray)
Detack Housing	1427473
Metering Bellcrank	1427307
Plenum	1328222
Prealign Bellcrank Parts Packet	1381145
Printhead	1381635

Optra M410/412

Model Information

	Optra M410/412
Engine Type:	4045
Model Number:	4045-001/4045-210
Release Date:	May-00
Max PPM:	12/17
Max DPI:	1200*
Duty Cycle:	20,000/40,000 pg/month

*Utilizes Lexmark's Image Quality Enhancement technology

✓ Fuser, 115V:	12G3982 (410 only) 12G3984 (412 only)
Maintenance Kit:	KIT-MAINT-M410 (410 only) KIT-MAINT-M412 (412 only)
Pickup Assembly:	N/A
Delivery Assembly:	12G0308 (lower redrive roller) 12G0307 (upper redrive roller)

✓ Pickup Roller:	12G0323
✓ MP Tray Pickup Roller:	12G0299
500-Sheet Tray PU Roller:	12G0399
Separation Pad:	N/A
✓ Transfer Roller:	12G0354
✓ Toner Cartridge:	4K00199 (10,000 pgs., 410 only) 17G0154 (15,000 pgs., 412 only)

Commonly Replaced Parts

Charge Roller Kit	12G0360/99A1017
Hot Roller	12G0326
MPF Input Tray	12G0266
Pressure Roller	12G0327

PARTS NOW!

Lexmark Hot Parts List - Monochrome Laser

2005

Optra N240/245

Model Information

	Optra N240/245
Engine Type:	WX
Model Number:	4040-240/4040-245
Release Date:	Mar-96
Max PPM:	24
Max DPI:	600
Duty Cycle:	100,000 pg/month

✓Fuser, 110V:	11A8233/RG5-4447
✓Maintenance Kit:	11A8122
✓Pickup Assembly:	RG5-1852
✓Delivery Assembly:	RG5-1874
✓Pickup Roller:	11A8155 (pickup rollers kit) 11A8184 (MP tray roller & separation pad)

Optional Tray Pickup Roller:	N/A
✓Separation Pad:	11A8184 (MP tray roller & separation pad)
✓Transfer Roller:	1382226/RF5-1412
✓Toner Cartridge:	1382140

Commonly Replaced Parts

Controller Card	11A8254
Lower Drawer Assembly	11A8263/R98-1004/C2930A
Upper Drawer Assembly	11A8105/R98-1005/C2931A

Optra S

Model Information

	Optra S 1250/55	Optra S 1620/1855	Optra S 1625/50	Optra S 2420/50/55	Optra Se 3455
Engine Type:	4059	4059	4059	4059	4059
Model Number:	4059-121/4059-125	4059-162/4059-185	4059-165/4059-160	4059-242/4059-240 4059-245	4059-345
Release Date:	May-97	Dec-97	Apr-98/May-97	Dec-97/May-97/Apr-98	Oct-98
Max PPM:	12	16/18	16	24	34
Max DPI:	1200	1200	1200	1200	1200
Duty Cycle:	35,000 pg/month	65,000 pg/month	65,000 pg/month	100,000 pg/month	150,000 pg/mo.

✓Fuser, 115V:	99A1185 (1250/55 only) 99A0966 (1620/50/55/1855 only) 99A1190 (2450/20/55 only) 99A1192 (3455 only)
✓Maintenance Kit:	N/A (1250/55 only) 99A0967 (1620/25/50/1855 only) 99A1195 (2420/2450/2455 only) 99A1197 (3455 only)
✓Pick Arm Assembly:	99A1056
Redrive Assembly:	99A0135
✓Pickup Rollers:	99A0070 (bag of 2)
✓MP Tray Pickup Roller:	99A0076
✓Separation Pad:	99A0083
✓Transfer Roller:	99A0179/99A1015

✓Toner Cartridge:	1382920 (7,500 pgs.: all but 3455) 1382925 (17,600 pgs.) 12A0825 (23,000 pgs.: 3455 only) 1382960 (diamond fine)
-------------------	---

Commonly Replaced Parts

500-Sheet Pick Arm Assembly	99A0405
Charge Roller Kit	99A1017/99A1033
Fuser Wiper	99A0725/99A0146
High Voltage Power Supply	99A0220
Operator Panel Assembly	99A0001
Printhead	99A0065 (1250/1650 only)
Printhead	99A1138 (1855 only)
Printhead	99A0066 (2450 series only)

PARTS NOW!

Lexmark Hot Parts List - Monochrome Laser

2005

Optra T & T620/622

Model Information

	Optra T610/12	Optra T614/16	T620/622
Engine Type:	4069	4069	4069
Model Number:	4069-010/4069-212	4069-414/4069-616	4069-520/4069-722
Release Date:	Sep-99	Sep-99	Jun-01
Max PPM:	15/20	25/35	30/40
Max DPI:	1200	1200	1200
Duty Cycle:	65,000/10,000 pg/mo.	130,000/200,000 pg/mo.	150,000/200,000 pg/mo.

✓Fuser, 115V:	99A1969 (610/12 only) 99A1977 (614/16 only) 99A2402 (620 only) 99A2405 (622 only)
✓Maintenance Kit:	99A1970 (610/12 only) 99A1971 (610/12 only) 99A1978 (614/16 only) 99A2408 (620 only) 99A2411 (622 only)
✓Pick Arm Assembly:	99A1056 (610/12 only) 99A1530 (614/16 only) 99A2444 (620/22 only)
Redrive Asm, 250-sheet:	99A1586 (610/612 only)
Redrive Asm, 500-sheet:	99A1604 (612 only) 99A1533 (614/16/20/22 only)
✓Pickup Roller:	99A0070 (bag of 2)

✓MP Tray Pickup Roller:	99A0076
Separation Pad:	99A0083
✓Transfer Roller:	99A1015/99A0179
✓Toner Cartridge, 10k pg.:	12A5840 (610/12/614 only)
✓Toner Cartridge, 25k pg.:	12A5849 (for labels)
✓Toner Cartridge:	12A6865 (620/622 only)
✓Toner Cartridge, 10k pg.:	12A6860 (620/622 only)

Commonly Replaced Parts

Charge Roll Assembly	99A1017 99A1033
Engine Card Assembly	56P0587 (614 only)
Fuser Cover	99A1966
Rip Card Assembly	99A1959 (612 only)

Optra W810

Model Information

	Optra W810
Engine Type:	4023
Model Number:	4023-001
Release Date:	Sep-99
Max PPM:	35
Max DPI:	600
Duty Cycle:	150,000 pg/month

✓Fuser, 110V:	12G2221
✓Maintenance Kit:	12G3421 (fuser kit)
Pickup Assembly:	N/A
Delivery Assembly:	N/A

✓Tray 1 Pickup Roller:	12G2475
✓Tray 2 & 3 Pickup Roller:	12G2562
✓Separation Pad:	12G2450 (tray 1)
✓Transfer Roller:	12G3425 (transfer kit)
✓Toner Cartridge, 20k pg.:	12L0250

Commonly Replaced Parts

Control Panel	12G3520
Lock Lever	12G2457
Photoconductor Kit	12L0251
Transport Assembly	12G2348

PARTS NOW!

Lexmark Hot Parts List - Monochrome Laser

2005

E210

Model Information

	Optra E210
Engine Type:	4510
Model Number:	4510-001
Release Date:	Jul-01
PPM:	12
Max DPI:	600
Duty Cycle:	5,000 pg/month

✓Fuser, 110V:	12G6773
Maintenance Kit:	N/A
Pickup Assembly:	N/A
Delivery Assembly:	N/A
✓Pickup Roller:	56P2501
Optional Tray Pickup Roller:	N/A
✓Separation Pad:	12G6779 (main) 12G6785 (left) 12G6786 (right)
✓Transfer Roller:	12G6770
✓Toner Cartridge:	10S0150

Commonly Replaced Parts

Pickup Roller Gear Clutch	12G6780
Lamp, 115V, 500W	12G6775

E232/330/332

Model Information

	E232	E330/332
Engine Type:	**	**
Model Number:	4505-200	4505-300/4505-310
Release Date:	Jun-04	Jun-04
PPM:	22	27
Max DPI:	2400*	2400*
Duty Cycle:	10,000 pg/month	15,000 pg/month

*Utilizes Lexmark's Image Quality Enhancement technology

✓Fuser, 110V:	56P1810
Maintenance Kit:	N/A
Pickup Assembly:	N/A
Delivery Assembly:	N/A
✓Pickup Roller:	56P1820
Optional Tray Pickup Roller:	N/A
Separation Pad:	N/A
✓Transfer Roller:	56P1823
✓Toner Cartridge:	12A8300

Commonly Replaced Parts

Photoconductor Kit	12A8300
--------------------	---------

E320/321/322/323

Model Information

	E320/322	E321/323
Engine Type:	4500	4500
Model Number:	4500-001/4500-002	4500-004/4500-005
Release Date:	Oct-01	Apr-03
Max PPM:	16	20
Max DPI:	1200*	1200*
Duty Cycle:	10,000/15,000 pg/mo	10,000/15,000 pg/mo

*Utilizes Lexmark's Image Quality Enhancement technology

✓Fuser, 110V:	12G4484 (320/322 only) 56P1053 (321/323 only)
Maintenance Kit:	N/A
Pickup Assembly:	12G4481
Redrive Assembly:	12G4493 (part of fuser)
✓Pickup Roller:	12G4483
Opt. Tray Pickup Roller:	12G4532
Separation Pad:	N/A
✓Transfer Roller:	12G4470
✓Toner Cartridge, 3k pg.:	08A0475 (320/322 only)

✓Toner Cartridge, 3k pg.:	08A0476 (Prebate; 320/322 only)
✓Toner Cartridge:	12A7300 (321/323 only)
✓Toner Cartridge:	12A7400 (Prebate; 321/323 only)

Commonly Replaced Parts

Charge Roller Assembly	12G4465/56P0685
Fan	12G4460
Feed Clutch	12G4541
Lower Registration Roller	12G4538
Power Supply	56P1097 (E321/323 only)

PARTS NOW!

Lexmark Hot Parts List - Monochrome Laser

2005

T420

Model Information

	T420
Engine Type:	4048
Model Number:	4048-001
Release Date:	Jan-03
Max PPM:	22
Max DPI:	1200*
Duty Cycle:	50,000 pg/month

✓Fuser, 110V:	56P0648
Maintenance Kit:	N/A
✓Pickup Assembly:	56P0657

Redrive Assembly:	N/A
✓Tray 1 Pickup Roller:	56P0656
✓MPF Pickup Roller Asm:	56P0613
Separation Pad:	56P0611 (lower housing asm; includes separation pad)
✓Transfer Roller:	56P0643
✓Toner Cartridge:	12A7310/12A7315 (high yield)

Commonly Replaced Parts

Charge Roller	56P0640
---------------	---------

T520/522

Model Information

	T520/522
Engine Type:	4520
Model Number:	4520-001/4520-210
Release Date:	Jun-01
Max PPM:	20/25
Max DPI:	1200
Duty Cycle:	120,000/100,000 pg/month

✓Fuser, 115V:	99A2423
✓Maintenance Kit:	56P1036/99A2420
✓Pick Arm Assembly:	99A2157 (520 only) 99A2079 (522 only)
✓Redrive Assembly:	99A2151 (250-sheet) 99A2029 (500-sheet)
✓Pickup Roller:	99A0070
✓MP Tray Pickup Roller:	99A0076
✓Separation Pad:	99A0083
✓Transfer Roller:	99A1015/99A0179
✓Toner Cartridge:	12A6730 (standard) 12A6830 (Prebate) 12A6735 (high yield)

Commonly Replaced Parts

Charge Roller	99A1017/99A1033
Engine Card Assembly	56P1005 (522 only) 56P1004 (520 only)
Printhead	99A2026

T630/632/634

Model Information

	T630/632/634
Engine Type:	4060
Model Number:	4060-0xx/4060-2xx/4060-4xx
Release Date:	Apr-03
Max PPM:	45/40/35
Max DPI:	1200
Duty Cycle:	175,000/200,000/225,000 pg/month

✓Fuser, 115V:	56P1333 (630/632 only) 56P1859 (634 only)
✓Maintenance Kit:	56P1409 (630/632 only) 56P1855 (634 only)
✓Pick Arm Assembly:	56P1326 (250-sheet) 56P1325 (500-sheet)
Redrive Assembly:	99A2151 (250-sheet) 56P1328 (500-sheet)
✓Pickup Roller:	99A0070
✓MP Tray Pickup Roller:	99A0076
✓Separation Pad:	56P1352
✓Transfer Roller:	56P1357
✓Toner Cartridge:	12A7462 (high yield)

Commonly Replaced Parts

Charge Roller	99A1017
Fuser Wiper, Wet	56P1415
Lower Front Cover	56P1309

PARTS NOW!

Lexmark Hot Parts List - Monochrome & Color Laser

2005

W812

Model Information

	W812
Engine Type:	4022
Model Number:	4022-100
Release Date:	Oct-02
Max PPM:	26
Max DPI:	1200*
Duty Cycle:	65,000 pg/month

*Utilizes Lexmark's Image Quality Enhancement technology

✓Fuser, 120V:	56P0884 (also fuser kit)
✓Maintenance Kit:	56P0884 (fuser kit)
Pickup Assembly:	56P0847
Redrive Assembly:	N/A
✓Pickup Roller:	56P0800 (for all trays)
Optional Tray Pickup Roller:	56P0841 (MP feeder)
✓Separation Pad:	56P0838 (for all trays)
✓Transfer Roller:	56P0878
✓Toner Cartridge:	14K0050

Commonly Replaced Parts

Undetermined at time of printing.

W820

Model Information

	W820
Engine Type:	4025
Model Number:	4025-001
Release Date:	Jun-01
Max PPM:	45
Max DPI:	1200*
Duty Cycle:	250,000 pg/month

*Utilizes Lexmark's Image Quality Enhancement technology

✓Fuser, LV:	12G4184
✓Maintenance Kit:	12G4182
Pickup Assembly:	N/A
Redrive Assembly:	N/A
✓Feed Roller Kit:	12G4031 (quantity 15)
Optional Tray Pickup Roller:	N/A
Separation Pad:	N/A
✓Transfer Roller:	12G4062
✓Toner Cartridge:	12B0090

Commonly Replaced Parts

Undetermined at time of printing.

Optra Color C

Model Information

	Optra C
Engine Type:	5045
Model Number:	5045-001
Release Date:	Sep-95/Apr-96
Max PPM:	3/12 (color/monochrome)
Max DPI:	600
Duty Cycle:	15,000 pg/month

✓Fuser, 110V:	11A2470
Maintenance Kit:	11A2374
Pickup Assembly:	N/A
Redrive Assembly:	11A2236
✓Pickup Roller:	11A2218
✓MP Tray Pickup Roller:	11A2231

✓Separation Pad:	11A2232 (MP tray)
Transfer Roller:	N/A
✓Toner Cartridge, Black:	1361210
✓Toner Cartridge, Cyan:	1361211
✓Toner Cartridge, Magenta:	1361212
✓Toner Cartridge, Yellow:	1361213

Commonly Replaced Parts

Oil	1361214
Oil Syringe	11A2455
Photoconductor Cartridge Kit	1361215
	(includes waste toner bottle)
Waste Oil Bottle	11A2456

PARTS NOW!

Lexmark Hot Parts List - Color Laser

2005

Optra Color 1200

Model Information

	Optra Color 1200
Engine Type:	5050
Model Number:	5050-001
Release Date:	Jun-98
Max PPM:	12/12 (color/monochrome)
Max DPI:	600
Duty Cycle:	20,000 pg/month

✓Fuser, 115V:	11G0375
✓Maintenance Kit:	11G0601
Pickup Assembly:	N/A
Redrive Assembly:	11G0135
✓Pickup Roller:	11G0271 (bag of 2)
MP Tray Pickup Roller:	11G0282
Separation Pad:	N/A
✓Transfer Belt:	11G0202
✓Toner Cartridge, Black:	12A1454
✓Toner Cartridge, Cyan:	12A1452
✓Toner Cartridge, Magenta:	12A1451
✓Toner Cartridge, Yellow:	12A1453

Commonly Replaced Parts

Black Photoconductor Kit	12A1450
Color Photoconductor Kit	12A1455
Control Board	11G0324
Fuser Oil Roller	11G0603
Subframe Assembly, Magenta	11G0543

Optra C710

Model Information

	Optra C710
Engine Type:	5016
Model Number:	5016-001
Release Date:	Sep-00
Max PPM:	3/16 (color/monochrome)
Max DPI:	1200
Duty Cycle:	35,000 pg/month

✓Fuser, 110V:	12G1698
✓Maintenance Kit:	10E0049 (fuser w/ filter)
Pickup Assembly:	N/A
Delivery Roller:	12G1389
✓Pickup Roller:	12G1379
✓Separation Pad:	12G1641 (tray 1) 12G1639/12G7099 (MP tray)
✓Transfer Roller:	12G1382
✓Toner Cartridge, Black:	10E0043 (w/ coating roller)
✓Toner Cartridge, Cyan:	10E0040
✓Toner Cartridge, Magenta:	10E0041
✓Toner Cartridge, Yellow:	10E0042

Commonly Replaced Parts

Coating/Cleaning Roller	10E0044
Coupling Drive Motor	12G1620
Transfer Kit	10E0045

Optra SC 1275

Model Information

	Optra SC 1275
Engine Type:	5040
Model Number:	5040-001
Release Date:	May-97
Max PPM:	3/12 (color/monochrome)
Max DPI:	600
Duty Cycle:	20,000 pg/month

✓Fuser, 110V:	12C0575/11C0152 (w/ transfer roller asm)
✓Maintenance Kit:	12C0575 (fuser w/ transfer roller asm)
Pickup Assembly:	N/A
Redrive Assembly:	12C0668 (upper roller) 12C0669 (lower roller)
✓Pickup Roller:	18A0492 (includes two rollers)
✓Bin 1 Pickup Roller:	12C0025

✓Separation Pad:	12C0016
✓Transfer Roller:	12C0014
✓Toner Cartridge, Black:	1361751
✓Toner Cartridge, Cyan:	1361752
✓Toner Cartridge, Magenta:	1361753
✓Toner Cartridge, Yellow:	1361754

Commonly Replaced Parts

Image Transfer Belt Assembly	12C0877
Gear Kit	18A0434
Photoconductor Cartridge Kit	1361750 (includes waste toner bottle/fuser coating roller)
Roller Kit	12C0544
Transfer Unit	12C0876

PARTS NOW!

Lexmark Hot Parts List - Color Laser

2005

C510

Model Information

	C510
Engine Type:	5021-0XX
Model Number:	5021
Release Date:	**
Max PPM:	8/30 (color/monochrome)
Max DPI:	2400*
Duty Cycle:	35,000 pg/month

*Utilizes Lexmark's Image Quality Enhancement technology

✓Fuser, 110V:	20K0506 (fuser kit)
Maintenance Kit:	N/A
Pickup Assembly:	N/A
Delivery Assembly:	N/A
✓Pickup Roller:	56P1655 (cassette)
✓Separation Pad:	56P1656
✓Transfer Roller:	56P1660
✓Toner Cartridge, Black:	20K1403
✓Toner Cartridge, Cyan:	20K1400
✓Toner Cartridge, Magenta:	20K1401
✓Toner Cartridge, Yellow:	20K1402

Commonly Replaced Parts

Photo Developing Cartridge	20K0504
Waste Toner Bottle	20K0505
Paper Exit Assembly	56P1677
Transfer Unit	56P1651

C720

Model Information

	C720
Engine Type:	5024
Model Number:	5024-001
Release Date:	May-01
Max PPM:	6/24 (color/monochrome)
Max DPI:	2400*
Duty Cycle:	35,000 pg/month

*Utilizes Lexmark's Image Quality Enhancement technology

✓Fuser, 115V:	15W0908 (fuser kit)
✓Maintenance Kit:	12G7220
Pickup Assembly:	N/A
Redrive Assembly:	12G7168
✓Pickup Roller:	12G7098
Optional Tray Pickup Roller:	N/A
✓Separation Pad:	12G7099
✓Transfer Roller:	12G7004
✓Toner Cartridge, Black:	15W0903
✓Toner Cartridge, Cyan:	15W0900
✓Toner Cartridge, Magenta:	15W0901
✓Toner Cartridge, Yellow:	15W0902

Commonly Replaced Parts

Cleaner Drum	12G7006
Developer Kit	15W0904
Oil Bottle	15W0906
Transfer Drum	12G7065

PARTS NOW!

Lexmark Hot Parts List - Color Laser

2005

C750/752

Model Information

	C750/752
Engine Type:	5060
Model Number:	5060-001/5060-2xx
Release Date:	Mar-02
Max PPM:	20/20 (color/monochrome)
Max DPI:	2400*
Duty Cycle:	60,000 pg/month

*Utilizes Lexmark's Image Quality Enhancement technology

✓Fuser, 115V:	12G6301
✓Fuser Kit:	12G6496
✓Transfer Kit:	56P1296 (w/ transfer roller)
Pickup Assembly:	12G6427
Redrive Assembly:	12G6492
✓Pickup Roller:	99A0070 (bag of 2)
Separation Pad:	N/A
✓Transfer Roller:	12G6303
✓Toner Cartridge, Black:	10B042K (6,000 pgs.)
✓Toner Cartridge, Cyan:	10B042C (6,000 pgs.)
✓Toner Cartridge, Magenta:	10B042M (6,000 pgs.)
✓Toner Cartridge, Yellow:	10B042Y (6,000 pgs.)

Commonly Replaced Parts

Intermediate Transfer Unit	56P1295
Waste Toner Collector	10B3100

C910/912

Model Information

	C910/C912
Engine Type:	5055
Model Number:	5055-1xx/5055-2xx
Release Date:	May-03
Max PPM:	28/28 (color/monochrome)
Max DPI:	2400*
Duty Cycle:	100,000 pg/month

*Utilizes Lexmark's Image Quality Enhancement technology

✓Fuser, 120V:	56P9751
Maintenance Kit:	56P9900 (fuser kit) 56P9903 (transfer kit)
Pickup Assembly:	N/A
Redrive Assembly:	56P9559
✓Pickup Roller:	56P9511
✓MP Tray Pickup Roller:	56P9971 (MP frame assembly)
Separation Pad:	N/A
✓Transfer Belt:	56P9694
✓Toner Cartridge, Black:	12N0771
✓Toner Cartridge, Cyan:	12N0768
✓Toner Cartridge, Magenta:	12N0769
✓Toner Cartridge, Yellow:	12N0770

Commonly Replaced Parts

Oil Coating Roller	12N0774
Photo Developer Kit, Black	12N0773
Photo Developer Kit, Color	12N0772

PARTS NOW!

Monochrome Maintenance Kit Guide

2005

Model	Part Number	OEM Recommended Page Interval
HP LJ II/IIID/III/IIID	33449-69007	100,000
HP LJ IIP/IIP Plus/IIIP	33481-69007	100,000
HP LJ IIISi/4Si	C2062-67902	200,000
HP LJ 4	C2001-69012	200,000
HP LJ 4 Plus (also HP LJ 5)	C2037-69010	200,000
HP LJ 4V	C3141-67915	200,000
HP LJ 5 (only)	C3916-67901	200,000
HP LJ 5L	H3971-60001	50,000
HP LJ 5P	H3973-60001	100,000
HP LJ 5Si/5Si Mopier/8000	C3971-67903	350,000
HP LJ 6L	H3972-60001	50,000
HP LJ 6P	H3966-60001	100,000
PN! HP LJ 1000/1200/1220/33xx	KIT-MAINT-1200	25,000*
HP LJ 1100	H3965-60001	50,000
PN! HP LJ 1300	KIT-MAINT-1300	50,000*
HP LJ 2100	H3974-60001	150,000
HP LJ 2200	H3978-60001	150,000
PN! HP LJ 2300	U6180-60001	150,000*
HP LJ 3100/3150	H3975-60001	50,000
HP LJ 3200	H3965-60001	25,000
HP LJ 4000/4050	C4118-67909	200,000
HP LJ 4100	C8057-67903	200,000
HP LJ 4200	Q2429A	200,000
HP LJ 4300	Q2436A	200,000
HP LJ 5000	C4110-67914	150,000
HP LJ 5100	Q1860-67908	150,000
HP LJ 8100/8150	C3914A	350,000
HP LJ 9000	C9152A	350,000
Lexmark LaserPrinter 12L/12R	1325531	200,000
Lexmark LaserPrinter 16L	1329140	200,000
PN! Lexmark Optra E310	KIT-MAINT-E310	50,000*
PN! Lexmark Optra M410	KIT-MAINT-M410	150,000*
PN! Lexmark Optra M412	KIT-MAINT-M412	150,000*
Lexmark Optra N240/245	11A8122	350,000
Lexmark Optra R/Rt/L	1325531	200,000
Lexmark Optra Rx/R+/Rt+/Lx/Lxi+/Lx+	1329140	200,000
Lexmark Optra S 1620/1625/1650/1855	99A0967	250,000
Lexmark Optra S 2420/2450/2455	99A1195	250,000
Lexmark Optra Se 3455	99A1197	250,000
Lexmark Optra T610/612	99A1970	300,000
Lexmark Optra T614/616	99A1978	300,000
Lexmark Optra W810 (fuser kit)	12G3421	250,000
Lexmark T520/522	99A2420	250,000
Lexmark T620	99A2408	300,000
Lexmark T622	99A2411	300,000
Lexmark T630/632	56P1409	300,000
Lexmark T634	56P1855	300,000
Lexmark W812 (fuser kit)	56P0884	100,000
Lexmark W820	12G4182	300,000

* Page interval as recommended by PARTS NOW!

PARTS NOW!

Color Maintenance Kit Guide

2005

Model	Part Number	OEM Rec. Page Interval (color/B&W)	Model	Part Number	OEM Rec. Page Interval (color/B&W)
HP CLJ/LJ 5			Lexmark Optra C		
• Print Drum	C3967A	30,000/60,000	• Maintenance Kit	11A2374	60,000/60,000
• Transfer Belt Assembly	C3968A	60,000/60,000	• Photoconductor Kit	1361215	as needed
• Fuser Kit	C3969A#110	80,000/80,000			
HP CLJ 1500/2500			Lexmark Optra C1200		
PNI • Maintenance Kit	KIT-MAINT-2500	as needed	• Maintenance Kit	11G0601	100,000/100,000
			• Black Photoconductor Kit	12A1450	13,000/13,000
			• Color Photoconductor Kit	12A1455	13,000/13,000
HP CLJ 4500/4550			Lexmark Optra C710		
• Drum Kit	C4195A	6,250/25,000	• Transfer Kit	10E0045	100,000/100,000
• Transfer Kit	C4196A	5,000/100,000	• Fuser Kit	10E0049	100,000/100,000
• Fuser Kit	C4197A	50,000/100,000	• Black Toner Cartridge Kit	10E0043	10,000/10,000
HP CLJ 3500/3700			Lexmark Optra SC 1275		
• Image Transfer Kit	Q3658A	75,000/75,000	• Image Transfer Belt Asm	12C0877	150,000/150,000
• Image Fuser Kit	Q3655A	75,000/75,000	• Fuser Assembly	12C0575	100,000/100,000
			• Photoconductor Kit	1361750	20,000/20,000
			• Transfer Roller Kit	11C0153/ 12C0014	100,000/100,000
HP CLJ 4600			Lexmark C720		
• Image Fuser Kit	C9725A	150,000/150,000	• Photo Developer Kit	15W0904	40,000/40,000
• Image Transfer Kit (ETB)	C9724A	120,000/120,000	• Fuser Kit	15W0908	40,000/40,000
			• Maintenance Kit (no fuser)	12G7220	120,000/120,000
HP CLJ 4650			Lexmark C750/C752		
• Image Fuser Kit	Q3676A	150,000/150,000	• ITU Maintenance Kit	56P1296	105,000/105,000
• Image Transfer Kit (ETB)	Q3675A	120,000/120,000	• Maintenance Kit	12G6496	150,000/150,000
			Lexmark C910/912		
HP CLJ 5500			• Black Developer Kit	12N0773	28,000/28,000
• Image Fuser Kit	C9735A	150,000/150,000	• Color Developer Kit	12N0772	28,000/28,000
• Image Transfer Kit	C9734A	120,000/120,000	• Fuser Kit	56P9900	120,000/120,000
			• Transfer Kit	56P9903	105,000/105,000
HP CLJ 8500/8550					
• Drum Kit	C4153A	12,500/50,000			
• Transfer Kit	C4154A	75,000/150,000			
• Fuser Kit	C4155A	50,000/100,000			
HP CLJ 9500					
• Image Cleaning Kit	C8554A	50,000/50,000			
• Image Transfer Kit	C8555A	200,000/200,000			
• Image Fuser Kit	C8556A	100,000/100,000			

The **PNI** symbol denotes a PARTS NOW! exclusive kit. see page 42 for contents of kits.

PARTS NOW!

HP Service Manuals

2005

Printer Name	Service & Parts Manual	User Manual / Guide
LJ II/III	33449-90906	33440-90901/33449-90901
LJ IID/IIID	33459-90906	33447-90901/33459-90901
LJ IIP/IIP+/IIIP	33481-90951	33481-90901
LJ IIISi/4Si	C2010-90939	C2010-90901
LJ 4/4+	C3916-90984	C2001-90912/C2037-90901
LJ 4L/4P	C3980-91078	C2003-90901/C2005-91022
LJ 4V	C3141-90929	C3141-90915
LJ 5	C3916-90984	C3916-99024
LJ 5L	C3990-90991	C3941-90901
LJ 5P	C3980-91078	C3150-99025
LJ 5Si/5Si Mopier	C4077-99016	C3166-99018*
LJ 6L	C3990-90991	C3990-90901
LJ 6P	C3980-91078	C3980-91037
LJ 1010/1012/1015	Q2460-90928	Q2460-90909
LJ 1100	C4224-90962	#
LJ 1150/1300	Q1334-90928	#
LJ 1200/1220	C7044-90906	C7044-60107
LJ 2100	C4170-90959	C4170-60129 (CD-ROM)
LJ 2200	C7058-90936	C7058-60106 (CD-ROM)
LJ 2300	Q2472-90911	#
LJ 3015/3020/3030 MFP	Q2665-90901	Q2669-90902 (3015 only) Q2665-90902 (3020/3030 only)
LJ 3100/3150	C4256-90956	C4256-90952
LJ 3200	C7052-90998	C7052-90951
LJ 3300	C9124-90948	#
LJ 3380 MFP	Q2660-90935	Q2660-90902
LJ 4000/4050	C4251-91003	C4118-99051*
LJ 4100	C8049-90925	C8049-60116 (CD-ROM)
LJ 4100 MFP	C9148-90909	#
LJ 4200/4300	Q2431-90916	#
LJ 5000	C4110-91041	C4110-99001
LJ 5100	Q1860-90918	#
LJ 8000	C4085-91087	C4085-60101
LJ 8100/8150	C4265-90963	C4214-60103
LJ 9000	C8519-90912	C8519-60106 (CD-ROM)
LJ 9000 MFP	C8523-90921	#
CLJ/CLJ5	C3961-91031	C3100-99001*/C3961-99014
CLJ 1500/2500	Q2488-90901	#
CLJ 2550	Q3702-90923	Q3702-90905
CLJ 3500/3700	Q1321-90930	Q1321-90901
CLJ 4500/4550	C7085-90921	#
CLJ 4600/4650	Q3668-90901	#
CLJ 5500	C9656-90930	#
CLJ 8500/8550	C7096-90986	#
CLJ 8550 Copy Module	C7834-90902	Not Available
CLJ 9500	C8546-90956	C8546-90987
Quick Reference Guide	Vol. 1 - 5021-8943 Vol. 2 - 5090-3390 Vol. 3 - 5961-0953 Vol. 4 - 5851-1428 Vol. 5 - 5851-1891	
CLJ Quick Reference Guide	Vol. 1 - 5041-9258	B07-08TH03
CLJ 4500/4550 Quick Reference Guide	5963-7921	B07-08TG02

Only available for download at www.hp.com
* Bundle, which includes Getting Started Guide

PARTS NOW!

Lexmark Service Manuals

2005

Printer Name	Service & Parts Manual	User Manual / Guide
LaserPrinter 4019 series	1039671	Not Available
LaserPrinter 4029 series (10/20/30/40 models)	1183432	Not Available
LaserPrinter 4039 series (10/12/16 series)	1419488/1419489	1419484 (10+ only)
Optra E	11A7626	Not Available
Optra E310/312	12G3613	12A2258
Optra L/R	13A0329	1408818
Optra M410/412	12G3517	12G0435
Optra N	11A9985	11A9051
Optra N Finisher	11A9935	11A9925
Optra S	12G0139	43H1702
Optra Se 3455	12G0139	11K0900
Optra T	12G3794	11K2280 (CD-ROM)
E210	12G6119	#
E232/330/332	12G9399	11S0051 (CD-ROM)
E320/321/322/323	12G9261	#
T420	12G9119	#
T520/522	12G3967	#
T620/622	12G3959	11K3100
T630/632/634	12G9328	10G0942
W810	12G3978	12L0401
W812	12G9161	#
W820	12G3663	12B0000
W820 Finisher	12G3781	12B0000
W820 Options	12G3782	12B0000
Optra C	69G3225	69G3241
Optra C710	12G6111	10E0201
Optra Color 1200	12G0169	11F0801
Optra SC 1275	12C0985	18A0006
C510	12G9320	Not Available
C720	12G3667	#
C750/752	12G9113	#
C910/912	12G9292	#

Only available for download at www.lexmark.com

Other manuals offered. Please call for part number and availability.

PARTS NOW!

HP Memory Guide

2005

Printer Name	MB	Part Number	Notes
LJ II, IID	1	33443B	
	2	33444B	
	4	33445B	
LJ IIP, IIP+, III, IIID, IIIP	1	33474	
	2	33475	
	4	33477	
LJ IIISi, 4Si, 4, 4+, 4P	2	C2064A	
	4	C2065A	
	8	C2066A	will not work in old style IIISi
LJ 4L	1	C2024A	
LJ 4+, 4P, 4V, 5, 5Si, 5P, 6P CLJ 5	2	C3131A	
	4	C3132A	
	8	C3133A	
	16	C3146A	does not work with 4P
LJ 5L, 6L	2	C3938A	
	4	C3148A	
	8	C3149A	
LJ 1100, 2100, 4000, 4050, 5000, 8000, 8100	4 EDO	C4135A	EDO RAM is slower
	8 EDO	C4136A	
	16 EDO	C4137A	
LJ 12xx, 1300, 2200, 2300, 3200, 33xx, 3380, 40xx, 4100, 4200, 4300, 5000, 5100, 8000, 81xx, 9000 CLJ 25xx, 4500, 85xx*	8 SDRAM	C7842A	100 Pin
	16 SDRAM	C7843A	
	32 SDRAM	C7845A	
	64 SDRAM	C7846A	
	64 SDRAM	Q1887A	*Install in pairs
LJ 1300, 40xx, 4100, 4200, 4300, 5000 5100, 8000, 8150, 9000, CLJ 4600, 5500, 9500	2 FLASH DIM	C4286A	100 pin
	4 FLASH DIM	C4287A	
LJ 2300, 4100, 4200, 4300, 5100, 9000, CLJ 2500, 2550	128 SDRAM	C9121A	100 Pin
LJ 5100, 4200, 4300, 8150	64 SDRAM	C9680A	100 Pin
LJ 5100	4 SDRAM	C4140A	
CLJ 3500, 3700, 4600, 5500, 9500	256 SDRAM	C9653A	168 Pin
CLJ 3500, 3700, 4550, 4600, 5500, 9500	64 SDRAM	C7848A	168 Pin
	128 SDRAM	C7850A	
CLJ 4650	128 DDR SDRAM	Q2630A	
	256 DDR SDRAM	Q2631A	
	512 DDR SDRAM	Q2632A	

PARTS NOW!

Lexmark Memory Guide

2005

Printer Name	MB	Part Number	Notes/Other Part Numbers
LaserPrinter 4019 series	1	1039136	
	2	1364933	1039137
	3.5	1364878	
LaserPrinter 4029 series (10/20/30/40 models)	1	1364936	
	2	1183334	1364906
	4	1364907	1183335
LaserPrinter 4039 series (10/12/16 series) Optra R/L/N/C	4	1364877	
	8	1364876	
	16	1364875	Optra R/L/N/C only
	32	1364874	Optra R/L/N/C only
	2 FLASH	1364922	
	4 FLASH	1364879	
Optra S	4	99A0517	
	8	99A0518	
	16	99A0519	
	32	99A0520	
	64 EDO	99A0724	
	1 FLASH	99A0521	
	2 FLASH	99A0522	
	4 FLASH	99A0523	
Optra T	8 SDRAM	16H0055	
Optra W	16 SDRAM	16H0056	
Optra C710/Lexmark C720	32 SDRAM	16H0057	
Optra M	64 SDRAM	16H0058	
Lexmark E 32X (up to 64 MB)	128 SDRAM	16H0059	
Lexmark T	2 FLASH	5K00215	
C510	4 FLASH	5K00216	
	8 FLASH	5K00217	
	16 FLASH	5K00218	
C750/C752, C910/912	64	11N0023	
	128	11N0025	
	256	11N0036	
	512	12N0847 (752 only)	
Optra Color 1200	16	11G0608	
	32	11G0609	
	32	11G0953	qty 2 16 MB SIMMs
	64	11G0954	qty 2 32 MB SIMMs
Optra SC 1275	4	45H0023	99A0517
	8	45H0024	99A0518
	16	45H0025	
	32	45H0026	99A0520
	64	45H0027	
	1 FLASH	45H0020	99A0521
	2 FLASH	45H0021	99A0522
	4 FLASH	45H0022	99A0523

PARTS NOW!

HP Part Number Cross Reference Guide

2005

HP Part Number	Part Description	PARTS NOW! Part Number
HP LaserJet III/4Si		
C2009-69002	DC Controller PCA (4Si only)	RG5-0842
C2009-69003	Laser Scanner Assembly	RG5-0153
C2009-69004	HV Power Supply	RG5-0170
C2009-69005	DC Power Supply, 110V (4Si only)	RG5-0168
C2009-69006	DC Power Supply, 220V (4Si only)	RG5-0169
C2009-69007	Paper Feed Assembly (PIU)	RG5-0025
C2009-69008	Job Offset Assembly	RG5-0381
HP LaserJet 4		
C2001-69002	DC Controller PCA	RG5-0511
C2001-69003	Fusing Assembly, 110V	RG5-0454
C2001-69004	Fusing Assembly, 220V	RG5-0455
C2001-69005	Paper Feed Assembly	RG5-0451
C2001-69006	Laser Scanner Assembly	RG5-0449
C2001-69007	Power Supply, 110V	RG5-0531
C2001-69009	High Voltage Power Supply	RG5-0513
C2001-69010	Display Assembly (English)	RG5-0533
HP LaserJet 4+/5		
C2037-69001	Fusing Assembly, 110V	RG5-0879
C2037-69002	Fusing Assembly, 220V	RG5-0880
C2037-69003	Paper Pickup Assembly (4+ only)	RG5-0877
C2037-69004	DC Controller PCA	RG5-0966
C2037-69005	Display Assembly (4+ only)	RG5-1076
C2037-69006	Power Supply, 110V	RG5-2499
C2037-69007	Power Supply, 220V	RG5-2500
C2037-69008	Laser Scanner Assembly	RG5-0903
C2037-69009	High Voltage Power Supply	RG5-0969
C3916-69005	Paper Feed Assembly (5 only)	RG5-2195
HP LaserJet 4L		
C2003-69003	DC Controller PCA, 110V	RG5-0753
C2003-69005	Laser Scanner Assembly	RG5-0662
HP LaserJet 4P		
C2005-69003	DC Controller PCA, 110V	RG5-0822
C2005-69005	Laser Scanner Assembly	RG5-0800
HP LaserJet 4V		
C3141-69001	Fusing Assembly, 220V	RG5-1558
C3141-69002	Fusing Assembly, 110V	RG5-1557
C3141-69003	DC Controller PCA	RG5-1559
C3141-69005	Power Supply Assembly, 110V	RH3-2150
C3141-69006	Power Supply Assembly, 220V	RH3-2174
C3141-69007	Paper Guide Plate Assembly	RG5-2248
HP LaserJet 5L		
C3941-69001	DC Controller PCA, 110V	RG5-2023
C3941-69002	DC Controller PCA, 220V	RG9-1256
C3941-69003	Laser Scanner Assembly	RG5-2004
HP LaserJet 5P		
C3150-69001	DC Controller PCA, 110V	RG5-1798
C3150-69002	DC Controller PCA, 220V	RG5-1809
C3150-69003	Fusing Assembly, 110V	RG5-1700
C3150-69004	Fusing Assembly, 220V	RG5-1701
C3150-69005	Laser Scanner Assembly	RG5-1780

PARTS NOW!

HP Part Number Cross Reference Guide

2005

HP Part Number	Part Description	PARTS NOW! Part Number
HP LaserJet 5Si/8000		
C3166-69005	High Voltage Power Supply	RG5-1888
C3166-69006	Laser Scanner Assembly	RG5-1895
C3166-69007	Low Voltage Power Supply, 110V	RG5-3676
C3166-69008	Low Voltage Power Supply, Universal	RG5-1878
C3166-69010	DC Controller PCA	RG5-1844
C3166-69011	Paper Input Unit	RG5-1852
C3166-69012	Fusing Assembly, 110V	RG5-4447
C3166-69013	Fusing Assembly, 220V	RG5-4448
HP LaserJet 6P		
C3980-69001	DC Controller PCA, 110V	RG5-2826
C3980-69002	DC Controller PCA, 220V	RG5-2827
C3980-69003	Fusing Assembly, 110V	RG5-4110
C3980-69004	Fusing Assembly, 220V	RG5-4111
C3980-69005	Laser Scanner Assembly	RG5-2848
HP LaserJet 2200		
C7058-69002	Fusing Assembly, 110V	RG5-5559
C7058-69003	Fusing Assembly, 220V	RG5-5569
HP LaserJet 4000/4050		
C4118-69003	Fusing Assembly, 110V	RG5-2661
C4118-69004	Fusing Assembly, 220V	RG5-2662
C4118-69005	Laser Scanner Assembly	RG5-2641
C4118-69006	Engine Controller, 110V	RG5-3693
HP LaserJet 4100		
C8049-69003	Engine Controller, 110V	RG5-5359
C8049-69004	Engine Controller, 220V	RG5-5360
C8049-69005	Laser Scanner Assembly	RG5-5100
C8049-69007	Fusing Assembly, 110V	RG5-5063
C8049-69008	Fusing Assembly, 220V	RG5-5064
HP LaserJet 4200		
Q2425-69001	Laser Scanner Assembly	RM1-0173
Q2425-69002	Power Supply, 110V	RM1-0019
Q2425-69005	Fusing Assembly, 110V	RM1-0013
Q2441-69002	500-sheet Tray	RM1-0028
HP LaserJet 4300		
Q2431-69001	Laser Scanner Assembly	RM1-0183
Q2431-69002	Power Supply, 110V	RM1-0107
Q2431-69005	Fusing Assembly, 110V	RM1-0101
Q2441-69002	500-sheet Tray	RM1-0028
HP LaserJet 5000		
C4110-69002	Fusing Assembly, 110V	RG5-5455
C4110-69003	Fusing Assembly, 220V	RG5-5456
C4110-69008	Laser Scanner Assembly	RG5-4811
HP LaserJet 5100		
Q1860-69004	Laser Scanner Assembly	RG5-7041
Q1860-69006	Power Supply, 110V	RG5-2248
Q1860-69007	Power Supply, 220V	RG5-2249
Q1860-69012	Main Drive Gear Assembly	RG5-7079
Q1860-69019	DC Controller PCA	RG5-7057

PARTS NOW!

HP Part Number Cross Reference Guide

2005

HP Part Number	Part Description	PARTS NOW! Part Number
HP LaserJet 5100 (continued)		
Q1860-69020	Fusing Assembly, 110V	RG5-7060
Q1860-69021	Fusing Assembly, 220V	RG5-7061
HP LaserJet 8100/8150		
C4214-69001	DC Controller PCA	RG5-4375
C4214-69003	Laser Scanner Assembly	RG5-4344
C4214-69017	Paper Input Unit	RG5-4334
C4214-69018	Fusing Assembly, 110V	RG5-6532
C4214-69019	Fusing Assembly, 220V	RG5-6533
HP LaserJet 9000		
C8519-67901	Formatter Assembly	C7860A
C8519-69007	Power Supply, 120V	RG5-5730
C8519-69015	High Voltage Power Supply	RG5-5728
C8519-69026	Fusing Assembly, 120V	RG5-5750
C8519-69028	DC Controller	RG5-5778
C9152-67902	Maintenance Kit, 120V	C9152A
HP Color LaserJet 2500		
C9705-69003	DC Controller	RG5-6959
HP Color LaserJet 4500/4550		
C7085-69002	ITB Assembly	RG5-5173
C7085-69003	HVPS (serial # JPHxxx and above)	RG5-5165
C7085-69004	Fusing Assembly, 110V	RG5-5154
C7085-69005	Fusing Assembly, 220V	RG5-5155
C7085-69006	ITB Drawer	RG5-5120
C4084-69005	Fuser Kit, 110V	R96-5008
C4084-69009	HVPS (serial # JPGxxx and below)	RG5-3285
C4084-69010	Laser Scanner Assembly	RG5-5175
C4084-69011	Power Supply, 110V	RH3-2219
HP Color LaserJet 4600		
C9660-69002	Fusing Assembly, 110V	RG5-6493
C9660-69004	ETB	RG5-6484
C9660-69007	Control Panel	RG5-6432
C9660-69008	Paper Pickup Assembly	RG5-6468
HP Color LaserJet 5500		
C9656-69011	ETB	RG5-6696
C9656-69012	Fusing Assembly, 110V	RG5-6848
C9656-69013	Fusing Assembly, 220V	RG5-6701
C9056-69014	DC Controller	RG5-6850
HP Color LaserJet 8500/8550		
C4781-69510	Paper Feed Assembly	RG5-3854
C7096-69007	Fusing Assembly, 110V	RG5-3060
C3983-69007	Laser Scanner Assembly	RG5-3936
C3983-69005	HV Convertor 1 PCA	RG5-3026
C3983-69008	HV Convertor 2 PCA	RG5-3943
C3983-69010	DC Controller PCB	RG5-3037
C7096-69010	Subrelay PC Board	RG5-3085
C7096-69009	Paper Pickup Assembly	RG5-3132

PARTS NOW!

Parts Now! Exclusive Kit Contents

2005

PARTS NOW! Exclusive Kits are maintenance kits assembled at our facility that help you keep your HP or Lexmark laser printer in top condition. The following kits are currently available and include parts as listed below.

LJ 4/4+/5 feed kit

part # - KIT-FEED-EX+EX
includes:
1 - RF5-0343
1 - RB1-3477
1 - RB1-2127
1 - RB1-2650

LJ 4V feed kit

part # - KIT-FEED-4V
includes:
1 - RB1-1411
1 - RF5-0302
1 - C3760-60506
2 - RB1-1386

LJ 5L/6L/3100/3150 feed kit

part # - KIT-FEED-AX
includes:
1 - RY7-5077
1 - RG5-3486

LJ 1100 fuser kit

part # - KIT-FUSER-1100
includes:
1 - RG5-4589
1 - RF5-2823

LJ 1100 paper jam kit

part # - KIT-FEED-1100
includes:
1 - RF5-2886
1 - RF5-2821
1 - RF5-2820
1 - RB2-4026

LJ 1000/12xx feed kit

part # - KIT-FEED-1200
includes:
1 - RL1-0303
1 - RF0-1014

LJ 1000/12xx maintenance kit

part # - KIT-MAINT-1200
includes:
1 - RG9-1493
1 - RG9-1483
1 - RL1-0303
1 - RF0-1014

LJ 1300 maintenance kit

part # - KIT-MAINT-1300
includes:
1 - RM1-0560
1 - RM1-0550
1 - RL1-0303
1 - RF0-1014

LJ 2100 feed kit

part # - KIT-FEED-2100
includes:
1 - RB2-2900
1 - RB2-6348
2 - RB2-6304
2 - RB9-0695

LJ 2200 feed kit

part # - KIT-FEED-2200
includes:
1 - RB2-2900
1 - RB2-6348
2 - RB2-6304
2 - RB9-0695

LJ 2200 fuser kit

part # - KIT-FUSER-2200
includes:
1 - RG5-5560
1 - RB2-6368

LJ 2300 feed kit

part # - KIT-FEED-2300
includes:
1 - RC1-0939
1 - RC1-0945
2 - RB2-6304
2 - RC1-0954

LJ 3100/3150 document feed kit

part # - KIT-DFEED-3100
includes:
1 - RG5-4772
1 - RB2-3430

LJ 3100/3150 fuser kit

part # - KIT-FUSER-3100
includes:
1 - RG5-4678
1 - RF5-2364

LJ 4100 pickup kit

part # - KIT-PICKUP-4100
includes:
1 - RB1-8867
4 - RB1-8957

LJ 5000 feed kit

part # - KIT-FEED-5000
includes:
1 - RB2-1820
1 - RF5-3439
2 - RB2-1821
2 - RG9-1485
4 - RB1-8865
2 - RF5-2634

LJ 8000 feed kit

part # - KIT-FEED-8000
includes:
8 - RF5-1834
2 - RF5-1835

LJ 8100 feed kit

part # - KIT-FEED-8100
includes:
8 - RF5-1834
2 - RF5-2708

CLJ 1500/2500 maintenance kit

part # - KIT-MAINT-2500
includes:
1 - RG5-6903
1 - RF5-4040
1 - RB3-0160
1 - RF5-4012

CLJ 4500/4550 feed kit

part # - KIT-FEED-4500
includes:
1 - RB2-0717
1 - RB2-0734
8 - RB1-8865
1 - RF5-2092
3 - RF5-1885
1 - RF5-2110
1 - RF5-2111

CLJ 8500/8550 feed kit

part # - KIT-FEED-8500
includes:
1 - RB1-9526
1 - RF5-1989
6 - RF5-1834
3 - RF5-1835

Optra E310 feed kit

part # - KIT-FEED-E310
includes:
1 - 12G0067
1 - 12G0062
1 - 12G0120
1 - 12G0119

Optra E310 maintenance kit

part # - KIT-MAINT-E310
includes:
1 - 12G0074
1 - 12G0048
1 - 12G0067
1 - 12G0062
1 - 12G0120
1 - 12G0119

Optra E312 feed kit

part # - KIT-FEED-E312
includes:
1 - 12G1933
1 - 12G0062
1 - 12G1932
1 - 12G1931

Optra E312 maintenance kit

part # - KIT-MAINT-E312
includes:
1 - 12G1935
1 - 12G0048
1 - 12G1933
1 - 12G0062
1 - 12G1932
1 - 12G1931

Optra M410 maintenance kit

part # - KIT-MAINT-M410
includes:
1 - 12G3982
1 - 12G0354
1 - 99A1017
1 - 12G0299
1 - 12G0323

Optra M412 maintenance kit

part # - KIT-MAINT-M412
includes:
1 - 12G3984
1 - 12G0354
1 - 99A1017
1 - 12G0299
1 - 12G0323

Optra S feed kit (all models)

part # - KIT-FEED-OPTRA S
includes:
3 - 99A0070
1 - 99A0179
1 - 99A1017

Optra S 1250 maintenance kit

part # - KIT-MAINT-S1250
includes:
1 - 99A1185
1 - 99A0179
1 - 99A1017
3 - 99A0070

Started in a Wisconsin garage in 1989, **PARTS NOW!** has grown to become the world's largest distributor of laser printer parts, along with earning a reputation for high-quality remanufacturing of parts. Specializing in HP, Lexmark, Canon, and Oki parts, **PARTS NOW!** has the largest inventory in the industry, rivaled only by the manufacturers themselves. Our size helps us bring you the parts you need — and the service you deserve.

PARTS NOW! offers

- Same day order shipping
- Free technical support
- Dedicated account representatives for personalized service

Visit us online to order parts, check status of your orders, or manage your RMAs at:
www.partsnow.com



3517 W. Beltline Hwy.
Madison, WI 53713
(608) 276-8688
fax (608) 276-9593
toll free (800) 886-6688